

STONE-MART

Travertine • Marble • Porcelain

2021 PRODUCT CATALOG


STM
STONE-MART

2021

TILE & STONE CATALOG

TABLE OF CONTENTS

Page 3

PRODUCT INDEX

By Alphabetical Order - Page 4
By Collection - Page 5
By Edge - Page 6
By Size - Page 6

ICONS/SYMBOLS

Page 7

PORCELAIN SERIES

Stone Look Collection - Page 8
Marble Look Collection - Page 22
Wood Look Collection - Page 70
Concrete Look Collection - Page 92
Designer Look Collection - Page 106

NATURAL STONE SERIES

Travertine Collection - Page 114
Marble Collection - Page 138
Limestone Collection - Page 160

INSTALLATION GUIDE

Porcelain Tile - Page 164

PACKAGING & WEIGHT

Porcelain - Page 166
Natural Stone - Page 168

ALPHABETICAL INDEX

PORCELAIN SERIES

A

ALAMO	10
ALASKA	94
ALBATROS	24
AMBERES	26
ANTRASIT-ATLANTIS	28
ARCANO	12
ARK	96
ARMA	30
ARMADA	32
ATLANTIS	72

B

BLANCO	108
BOLIVIA	74

C

CALACATTA	34
CANYON	36
CARRARA	38

D

DOLMEN	98
DOLOMITI BIANCO	40
DUVAL	42

E

ELCANO	76
ELEVEN	78

F

FACTORY	100
FOREST	80

K

KERALA	44

L

LAGUNA	82
LEONARDO	14
LUNA	110

M

MARJINAL	112
MARN	102
MINERAL	16
MOOD	46

N

NARA	18

O

OLD WOOD	84
OMNIA	48
ONIKS	50
OPAL	52

P

PALATINA	54
PEARL	56
PECAN	86
PULPIS	58

R

RODUM	60
ROYAL PULPIS	62
ROYAL TRAVERTINE	20

S

SERPEGIANTE	64
SIRIUS	66
STATUARIO	68

T

TEAKWOOD	88
TIBERWOOD	90

V

VISTA	104

NATURAL STONE SERIES

A

ANTIQUE ONYX	116
AUTUMN BLEND	118

B

BIANCO	140

C

CAPPADOCIA	120
CAPPUCCINO	142
COUNTRY CLASSIC	122

D

DIANA ROYAL	144

E

EPHESUS	146

I

IVORY	124

L

LEONARDO	126
LEONYX	128
LILAC	148

N

NOCE	132

P

PICASSO	150
PLATINUM GRAY	152

R

RIVER	132
ROMAN BLEND	134

S

SHELL STONE	162
SILVER	136
SKYLINE	154

T

TALYA GRAY	156

W

WHITE PEARL	158

PRODUCT INDEX - BY COLLECTION

PORCELAIN SERIES

STONE LOOK COLLECTION

ALAMO	10
ARCANO	12
LEONARDO	14
MINERAL	16
NARA	18
ROYAL TRAVERTINE	20

MARBLE LOOK COLLECTION

ALBATROS	24
AMBERES	26
ANTRASIT-ATLANTIS	28
ARMA	30
ARMADA	32
CALACATTA	34
CANYON	36
CARRARA	38
DOLOMITI BIANCO	40
DUVAL	42
KERALA	44
MOOD	46
OMNIA	48
ONIKS	50
OPAL	52
PALATINA	54
PEARL	56
PULPIS	58
RODUM	60
ROYAL PULPIS	62
SERPEGIANTE	64
SIRIUS	66
STATUARIO	68

WOOD LOOK COLLECTION

ATLANTIS	72
BOLIVIA	74
ELCANO	76
ELEVEN	78
FOREST	80
LAGUNA	82
OLD WOOD	84
PECAN	86
TEAKWOOD	88
TIBERWOOD	90

CONCRETE LOOK COLLECTION

ALASKA	94
ARK	96
DOLMEN	98
FACTORY	100
MARN	102
VISTA	104

DESIGNER LOOK COLLECTION

BLANCO	108
LUNA	110
MARJINAL	112

NATURAL STONE SERIES

TRAVERTINE

ANTIQUE ONYX	116
AUTUMN BLEND	118
CAPPADOCIA	120
COUNTRY CLASSIC	122
IVORY	124
LEOANRDO	126
LEONYX	128
NOCE	130
RIVER	132
ROMAN BLEND	134
SILVER	136

LIMESTONE

SHELL STONE	162

MARBLE

BIANCO	142
CAPPUCCINO	144
DIANA ROYAL	146
EPHESUS	148
LILAC	150
PICASSO	152
PLATINUM GRAY	154
SKYLINE	156
TALYA GRAY	158
WHITE PEARL	160

PRODUCT INDEX - BY EDGE/SIZE

GLAZED PORCELAIN "RECTIFIED"

12x24

ARK	96
BLANCO	108
CANYON	36
LUNA	110
MARJINAL	112
MOOD	46
OMNIA	48
PALATINA	54
PULPIS	58
STATUARIO	68

32x32

ALASKA	94
ARMA	30
CALACATTA	34
DOLMEN	98
DUVAL	42
ROYAL PULPIS	62
ROYAL TRAVERTINE	20
VISTA	104

9x48

ELEVEN	80
PECAN	88

12x48

FOREST	82
LAGUNA	84
OLD WOOD	86
TIBERWOOD	92

24x48

ALBATROS	24
ANTRASIT-ATLANTIS	28
ARMADA	32
DOLOMITI BIANCO	40
LEONARDO	14
MARJINAL	112
MARN	102
ONIKS	50
OPAL	52
PEARL	56
SERPEGIANTE	64
SIRIUS	66
VISTA	104

GLAZED PORCELAIN "PRESSED'

12x24

ALAMO	10
AMBERES	26
ARCANO	12
CARRARA	38
FACTORY	100
KERALA	44
MINERAL	16
NARA	18
RODUM	60
TEAKWOOD	88

9x35

ATLANTIS	72

9x48

BOLIVIA	74
ELCANO	76

ICONS / SYMBOLS

SHADE VARIATION

V0 No Variation

V1 Even Appearance



V2 Light Variation



V3 Medium Variation



V4 Strong Variation

P.E.I RATING

I — **Floor tiles recomended for light traffic areas**
Bedrooms and bathrooms of private residences.

II — **Floor tiles recommended for medium-traffic areas.**
All rooms of private residences with exception of kitchens.

III — **Floor tiles recommended for medium-traffic areas.**
Residential/light commercial areas like entrances.

IV — **Floor tiles recommended for medium-heavy traffic areas.**
Light commercial heavy-traffic areas like restaurants and shopping stores.

V — **Floor tiles recommended for highly stressed areas.**
Heavy commercial traffic for indoors and outdooors in large commercial applications. (In accordance with ISO HI0545-7)

SYMBOLS



Floor & Wall



Pools



Exterior



Home



Light Commercial



Heavy Commercial



Matte Finish



Glossy Finish




Polished Finish



Face



Pressed



Rectified



Anti-Slip



Frost Proof



Ink Jet

Icons shown above are approved for products to be used in various applications. Please contact a representative if you have any questions or concerns.

PORCELAIN - COLOR COLLECTION CHART

Red
Designer Look Collection

Gray
Concrete Look Collection

Brown
Wood Look Collection

Green
Marble Look Collection

Blue
Stone Look Collection

NATURAL STONE - COLOR COLLECTION CHART

Yellow
Travertine Collection

Aqua
Marble Collection

Violet
Limestone Collection



Installed with: 12"x24" ARCANO GRIS Porcelain Tile



STONE LOOK COLLECTION

GLAZED PORCELAIN

ALAMO 10
ARCANO 12
LEONARDO 14
MINERAL 16
NARA 18
ROYAL TRAVERTINE 20



ALAMO

GLAZED PORCELAIN
Pressed

STONE-MART

Installed with:
ALAMO - GRAFITO
12"x24" (30x60cm)

ALAMO
PRESSED-GLAZED PORCELAIN

STONE LOOK COLLECTION

ALAMO GRAFITO



11.8"x23.6" P.E.I. IV
(30x60cm)

ALAMO GRIS



11.8"x23.6" P.E.I. IV
(30x60cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.42	✓
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	✓
Ramps & Inclines	≥ 0.42	✓
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.42	✓
Heavy Commercial	≥ 0.42	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.42

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	9/32"	15.52	8

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 23.8" x 23.8" (60.5 cm x 60.5cm)
- 18" x 18" (45 cm x 45cm)



ARCANO

GLAZED PORCELAIN
Pressed

STONE-MART

Installed with:
ARCANO - GRIS
12”x24” (30x60cm)

ARCANO GRIS



11.8"x23.6"
(30x60cm)

P.E.I. IV

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	≥ 0.35	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	✓
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V3



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	9/32"	15.52	8



LEONARDO

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
LEONARDO - BONE
24"x48" (60x120cm)

LEONARDO
RECTIFIED-GLAZED PORCELAIN

STONE LOOK COLLECTION

LEONARDO BONE



23.6"x47.2" P.E.I. IV
(60x120cm)

LEONARDO GRAY



23.6"x47.2" - P.E.I. IV
(60x120cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.42	✓
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	✓
Ramps & Inclines	≥ 0.42	✓
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.42	✓
Heavy Commercial	≥ 0.42	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.42

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V2

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
24" x 48"(Nominal Size)	5/16"	15.48	2



MINERAL

GLAZED PORCELAIN
Pressed

STONE-MART

Installed with:
MINERAL - GRIS
12”x24” (30x60cm)

MINERAL BLANCO

11.8"x23.6"
(30x60cm)

P.E.I. IV

MINERAL GRIS



11.8"x23.6"
(30x60cm)

P.E.I. IV

MINERAL PERLA



11.8"x23.6"
(30x60cm)

P.E.I. IV

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 240 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V2

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	9/32"	15.52	8



NARA

GLAZED PORCELAIN
Pressed

STONE-MART

Installed with:
NARA - BLANCO
12”x24” (30x60cm)

NARA
PRESSED-GLAZED PORCELAIN


STONE LOOK COLLECTION

NARA BLANCO



11.8"x23.6" P.E.I. IV
(30x60cm)

NARA GRIS

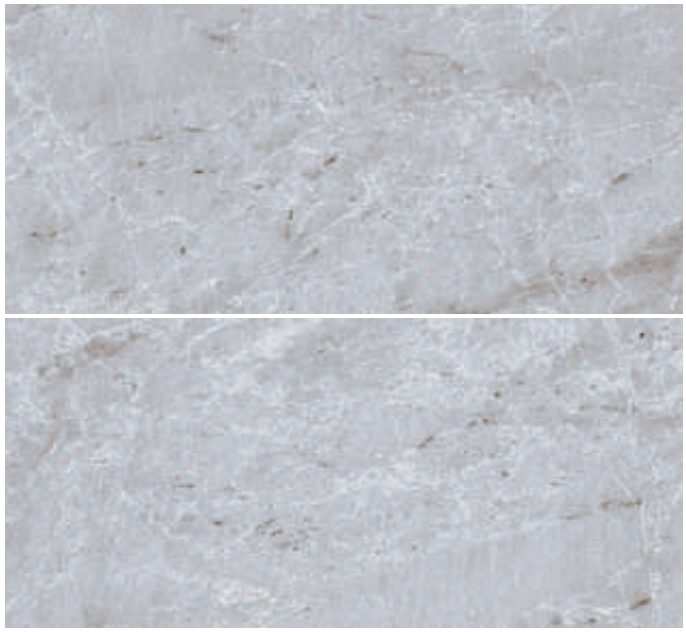

11.8"x23.6" P.E.I. IV
(30x60cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 240 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	9/32"	15.52	8



ROYAL TRAVERTINE

POLISHED-NANO FINISH PORCELAIN
Rectified

STONE-MART

Installed with:
ROYAL TRAVERTINE - BEIGE
32"x32" (80x80cm)

ROYAL TRAVERTINE
RECTIFIED POLISHED-NANO FINISH PORCELAIN

STONE LOOK COLLECTION

ROYAL TRAVERTINE BEIGE



31.5"x31.5"
(80x80cm)

P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
32" x 32"(Nominal Size)	5/16"	13.78	2

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 24" x 48"
(60cm x 120cm)



Installed with: 12"x24" PALATINA BLANCO Porcelain Tile



MARBLE LOOK COLLECTION

GLAZED PORCELAIN

ALBATROS 24
AMBERES 26
ANTRASIT-ATLANTIS 28
ARMA 30
ARMADA 32
CALACATTA 34
CANYON 36
CARRARA 38
DOLOMITI BIANCO 40
DUVAL 42
KERALA 44
MOOD 46
OMNIA 48
ONIKS 50
OPAL 52
PALATINA 54
PEARL 56
PULPIS 58
RODUM 60
ROYAL PULPIS 62
SERPEGIANTE 64
SIRIUS 66
STATUARIO 68



ALBATROS

POLISHED-NANO FINISH PORCELAIN
Rectified

STONE-MART

Installed with:
ALBATROS - WHITE
24"x48" (60x120cm)

ALBATROS
RECTIFIED POLISHED-NANO FINISH PORCELAIN

MARBLE LOOK COLLECTION

ALBATROS WHITE



23.6"x47.2"
(60x120cm)

P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V2

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
24" x 48"(Nominal Size)	5/16"	15.48	2

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 48" x 48" - Rectified (120cm x 120cm)
- 48" x 96" - Rectified (120cm x 240cm)



AMBERES

GLAZED PORCELAIN
Pressed


STONE-MART

Installed with:
AMBERES - PERLA
12"x24" (30x60cm)

AMBERES
PRESSED-GLAZED PORCELAIN

MARBLE LOOK COLLECTION

AMBERES GRIS

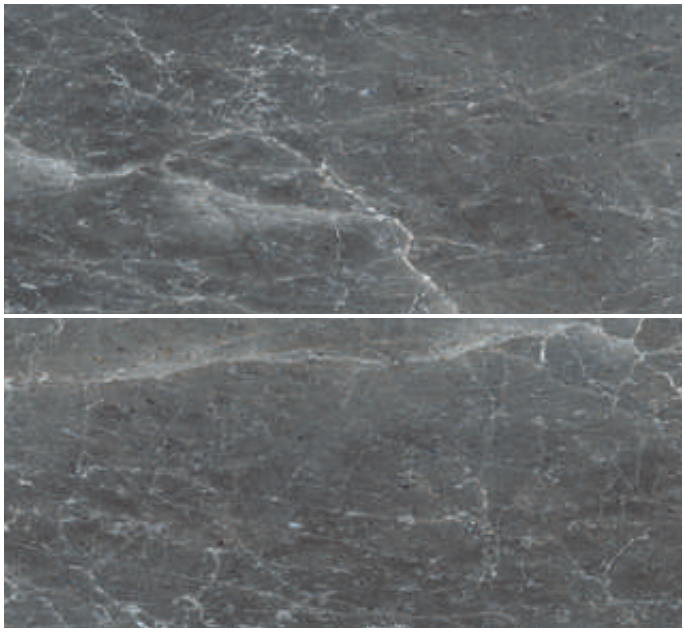

11.8"x23.6" P.E.I. III
(30x60cm)

AMBERES PERLA



11.8"x23.6" P.E.I. IV
(30x60cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	9/32"	15.52	8

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 23.8" x 23.8"
(60.5 cm x 60.5cm)



ANTRASIT-ATLANTIS

POLISHED-NANO FINISH PORCELAIN
Rectified


STONE-MART

Installed with:
ANTRASIT ATLANTIS - GRAY
24"x48" (60x120cm)

ANTRASIT-ATLANTIS
RECTIFIED POLISHED-NANO FINISH PORCELAIN

MARBLE LOOK COLLECTION

ANTRASIT-ATLANTIS GRAY

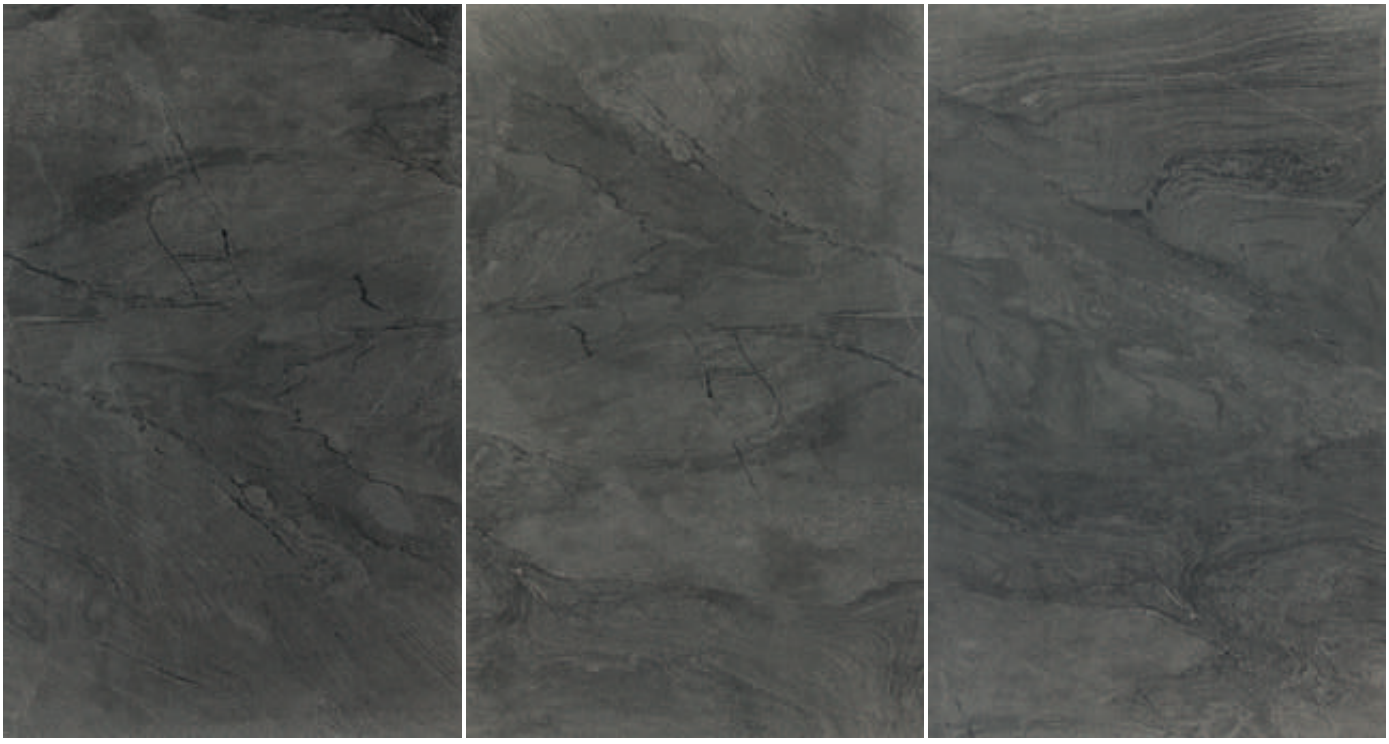

23.6"x47.2"
(60x120cm)

P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V4

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
24" x 48"(Nominal Size)	5/16"	15.48	2

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 48" x 96"
(120cm x 240cm)



ARMA

POLISHED-NANO FINISH PORCELAIN
Rectified

STONE-MART

Installed with:
ARMA - GRAY
32"x32" (80x80cm)

ARMA GRAY POLISHED



31.5"x31.5"
(80x80cm)

P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V3



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
32" x 32"(Nominal Size)	5/16"	13.78	2

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 23.6" x 47.2" - Rectified (60cm x 120cm)
- 15.78" x 31.5" (40cm x 80cm)



ARMADA

POLISHED-NANO FINISH PORCELAIN
Rectified

STONE-MART

Installed with:
ARMADA - WHITE
24"x48" (60x120cm)

ARMADA
RECTIFIED POLISHED-NANO FINISH PORCELAIN

MARBLE LOOK COLLECTION

ARMADA WHITE



23.6"x47.2"
(60x120cm)

P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V2

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
24" x 48"(Nominal Size)	5/16"	15.48	2



CALACATTA

POLISHED-NANO FINISH PORCELAIN
Rectified

STONE-MART

Installed with:
CALACATTA - WHITE
32"x32" (80x80cm)

CALACATTA
RECTIFIED POLISHED-NANO FINISH PORCELAIN

MARBLE LOOK COLLECTION

CALACATTA WHITE



31.5"x31.5"
(80x80cm)

P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V2

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
32" x 32"(Nominal Size)	5/16"	13.78	2

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 23.6" x 23.6" (60cm x 60cm)
- 11.81" x 29.53" (30cm x 75cm)



CANYON

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
CANYON - GRIGIO
12”x24” (30x60cm)

CANYON GRIGIO



11.8"x23.6"
(30x60cm)

P.E.I. IV

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 240 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V3



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	5/16"	15.52	8

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 23.6" x 47.2" (60cm x 120cm)
- 23.6" x 23.6" (60cm x 60cm)
- 11.8" x 47.2" (30cm x 120cm)



CARRARA

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
CARRARA - WHITE
12"x24" (30x60cm)

CARRARA
RECTIFIED-GLAZED PORCELAIN

MARBLE LOOK COLLECTION

CARRARA WHITE - GLOSSY



11.8″x23.6″ P.E.I. IV
(30x60cm)

GLOSSY MOSAIC



2″x2" (12x12 Sheet) P.E.I. IV
(30x30cm)

CARRARA WHITE - MATTE



11.8″x23.6″ P.E.I. IV
(30x60cm)

MATTE MOSAIC



2″x2" (12x12 Sheet) P.E.I. IV
(30x30cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	✓
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 240 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:
- 1/8” min. recommended for pressed tile
- 1/16” min. recommended for rectified tile
- 3/16” when installing tile with a length 15” or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64”

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12” x 24”(Nominal Size)	3/8”	15.52	8

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 23.6" x 47.2" (60cm x 120cm)
- 23.6" x 23.6" (60cm x 60cm)



DOLOMITI BIANCO

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
DOLOMITI - BIANCO
24"x48" (60x120cm)

DOLOMITI BIANCO
RECTIFIED-GLAZED PORCELAIN

MARBLE LOOK COLLECTION

DOLOMITI BIANCO



23.6"x47.2"
(60x120cm)

P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	≥ 0.35	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	N/A	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation	Shade Variation
Floor:	V2
• 1/8" min. recommended for pressed tile	
• 1/16" min. recommended for rectified tile	
• 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)	
• Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"	

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
24" x 48"(Nominal Size)	9/32"	23.25	3



DUVAL

POLISHED-NANO FINISH PORCELAIN
Rectified

STONE-MART

Installed with:
DUVAL - WHITE
32"x32" (80x80cm)

DUVAL
RECTIFIED POLISHED-NANO FINISH PORCELAIN

MARBLE LOOK COLLECTION

DUVAL WHITE

31.5"x31.5"
(80x80cm)

P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
32" x 32"(Nominal Size)	5/16"	13.78	2

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 16" x 32" (40cm x 80cm)
- 23.6" x 47.2" - Rectified (60cm x 120cm)



KERALA

GLAZED PORCELAIN
Pressed

STONE-MART

Installed with:
KERALA - GREIGE
12"x24" (30x60cm)

KERALA GRAY



11.8"x23.6" (30x60cm) P.E.I. IV

KERALA GREIGE

11.8"x23.6" (30x60cm) P.E.I. IV

KERALA WHITE

11.8"x23.6" (30x60cm) P.E.I. IV

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	9/32"	15.52	8



MOOD

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
MOOD - GRAY
12”x24” (30x60cm)

MOOD
RECTIFIED-GLAZED PORCELAIN

MARBLE LOOK COLLECTION

MOOD GRAY

11.8"x23.6" P.E.I. IV
(30x60cm)

MOOD IVORY

11.8"x23.6" P.E.I. IV
(30x60cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 240 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	5/16"	15.52	8

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 39.3" x 39.3" (100cm x 100cm)
- 23.6" x 47.2" (60cm x 120cm)
- 23.6" x 23.6" (60cm x 60cm)
- 11.8" x 47.2" (30cm x 120cm)




OMNIA

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
OMNIA - GRAY
12”x24” (30x60cm)

OMNIA GRAY

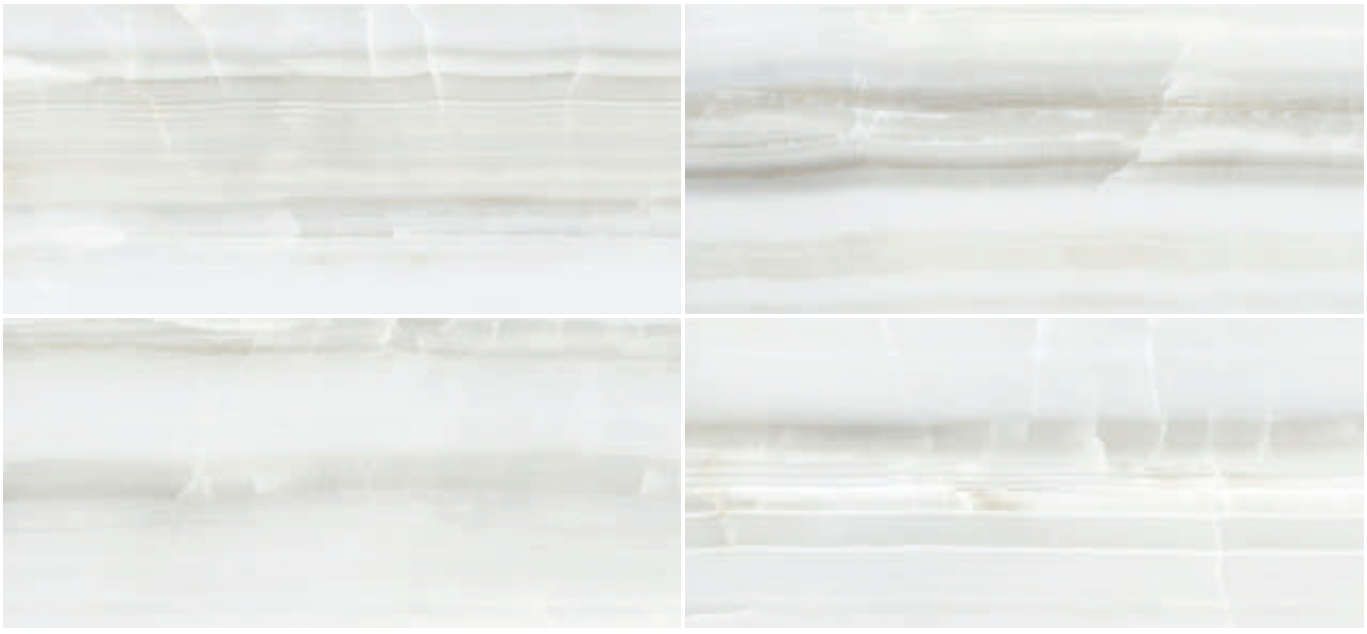

11.8"x23.6"
(30x60cm)

P.E.I. IV

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 240 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V3

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	5/16"	15.52	8

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 23.6" x 47.2" (60cm x 120cm)
- 23.6" x 23.6" (60cm x 60cm)
- 11.8" x 47.2" (30cm x 120cm)



ONIKS

POLISHED-NANO FINISH PORCELAIN
Rectified


STONE-MART

Installed with:
ONIKS - WHITE
24”x48” (60x120cm)

ONIKS
RECTIFIED POLISHED-NANO FINISH PORCELAIN

MARBLE LOOK COLLECTION

ONIKS WHITE

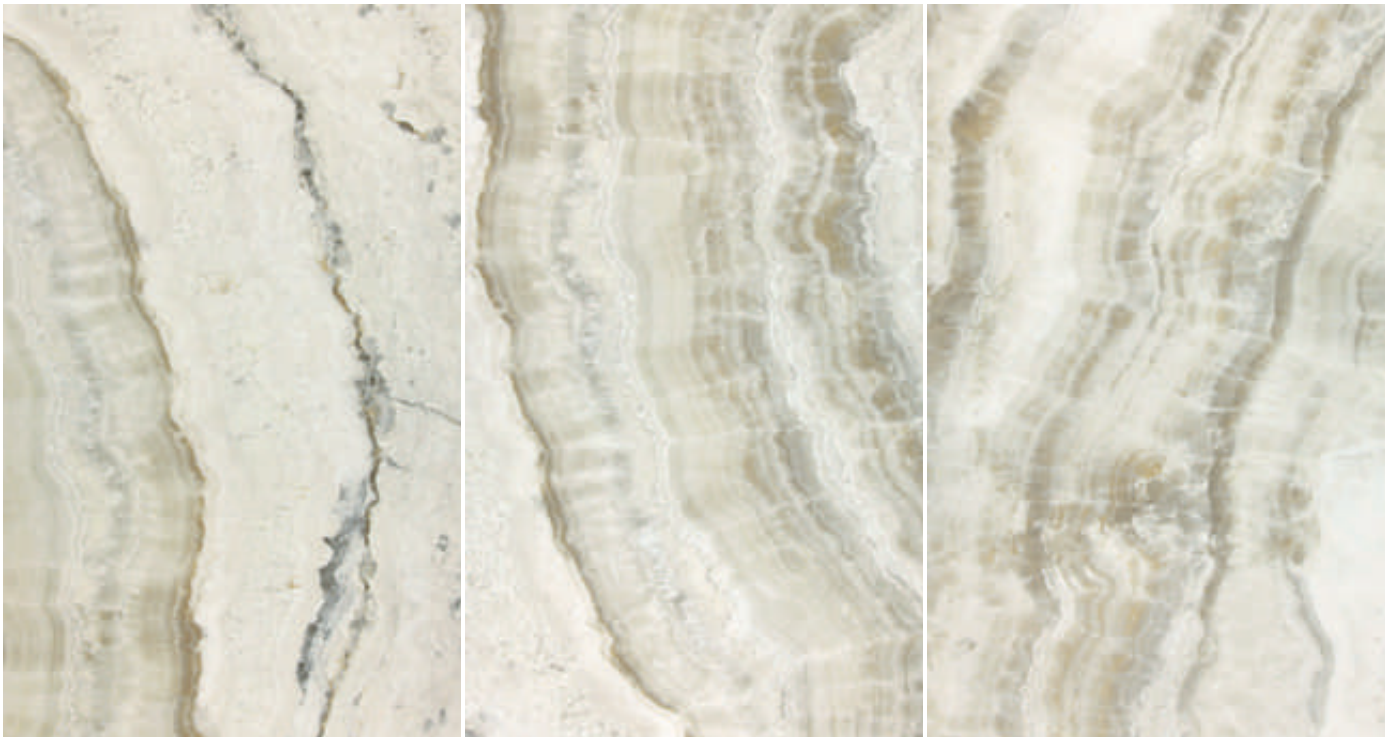

23.6"x47.2"
(60x120cm)

P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V3

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
24" x 48"(Nominal Size)	5/16"	15.48	2

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 48" x 96"
(120cm x 240cm)



OPAL

POLISHED-NANO FINISH PORCELAIN
Rectified

STONE-MART

Installed with:
OPAL - GRAY
24"x48" (60x120cm)

OPAL
RECTIFIED POLISHED-NANO FINISH PORCELAIN


MARBLE LOOK COLLECTION

OPAL BONE



23.6"x47.2" (60x120cm) P.E.I. III

OPAL GRAY

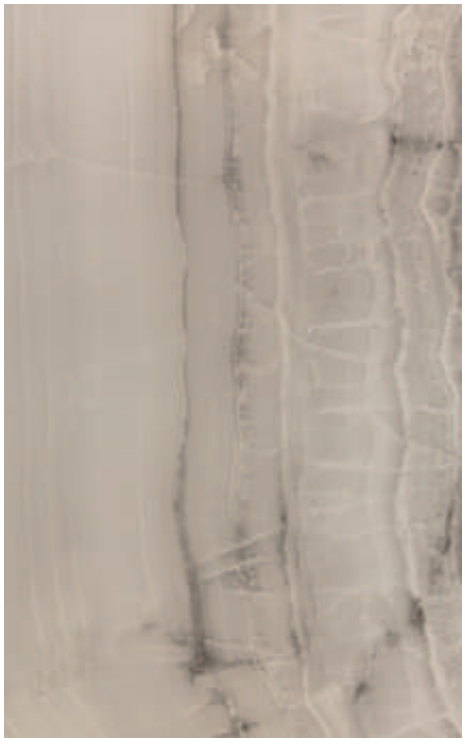

23.6"x47.2" (60x120cm) P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
24" x 48"(Nominal Size)	5/16"	15.48	2

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 31.5" x 31.5" - Rectified Bone (80cm x 80cm)
- 48" x 48" - Bone (120cm x 120cm)
- 48" x 96" - Bone (120cm x 240cm)



PALATINA

GLAZED PORCELAIN
Pressed

STONE-MART

Installed with:
PALATINA - BLANCO
12"x24" (30x60cm)

PALATINA BLANCO



11.8"x23.6"
(30x60cm)

P.E.I. IV

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:
- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	9/32"	15.52	8

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 47.2" x 47.2" - Rectified (120cm x 120cm)
- 23.6" x 47.2" - Rectified (60cm x 120cm)
- 23.6" x 23.6" (60cm x 60cm)




PEARL

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
PEARL
12”x24” (30x60cm)

PEARL

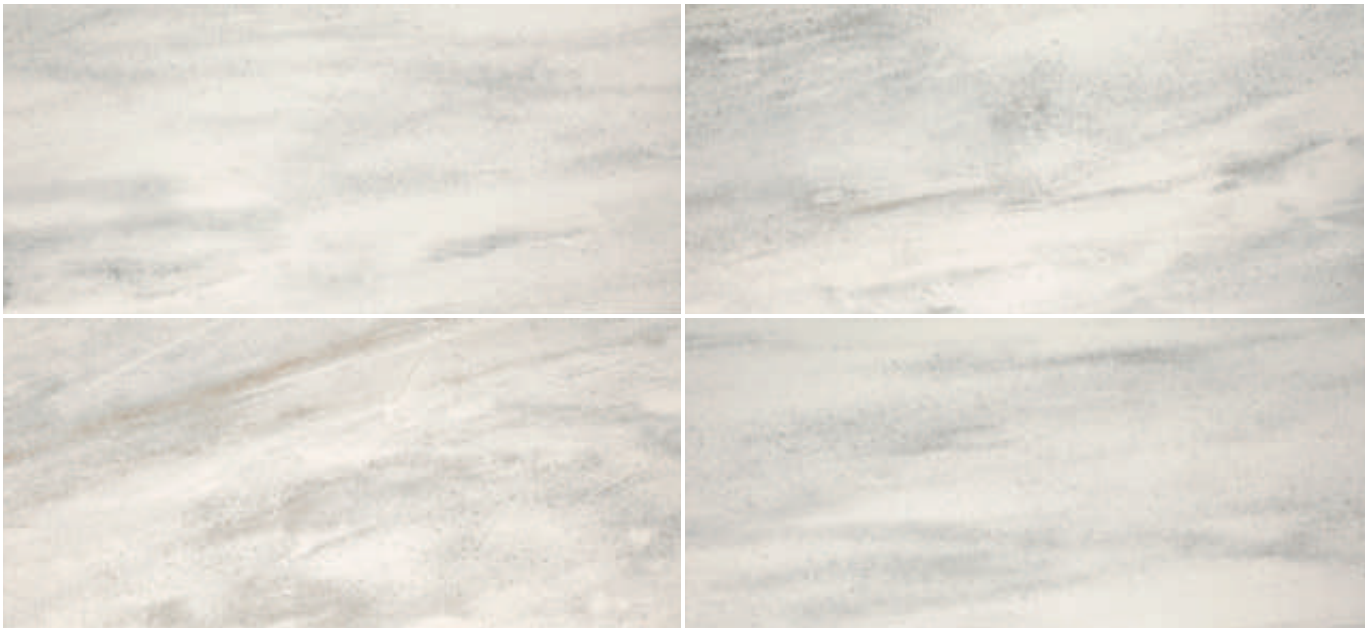

11.8"x23.6"
(60x120cm)

P.E.I. II

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	≥ 0.35	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	N/A	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V2

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	9/32"	15.52	8



PULPIS

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
PULPIS - GRAY
12"x24" (30x60cm)

PULPIS
RECTIFIED-GLAZED PORCELAIN


MARBLE LOOK COLLECTION

PULPIS GRAY - GLOSSY



11.8"x23.6" P.E.I. III
(30x60cm)

GLOSSY MOSAIC




2"x2" (12x12 Sheet) P.E.I. III
(30x30cm)

PULPIS GRAY - MATTE



11.8"x23.6" P.E.I. III
(30x60cm)

MATTE MOSAIC



2"x2" (12x12 Sheet) P.E.I. III
(30x30cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	≥ 0.35	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 240 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V3

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	9/32"	15.52	8

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 39.3" x 39.3" (100cm x 100cm)
- 23.6" x 47.2" (60cm x 120cm)
- 23.6" x 23.6" (60cm x 60cm)
- 11.8" x 47.2" (30cm x 120cm)



RODUM

GLAZED PORCELAIN
Pressed


STONE-MART

Installed with:
RODUM - GRIS
12”x24” (30x60cm)

RODUM
PRESSED-GLAZED PORCELAIN

MARBLE LOOK COLLECTION

RODUM GRIS

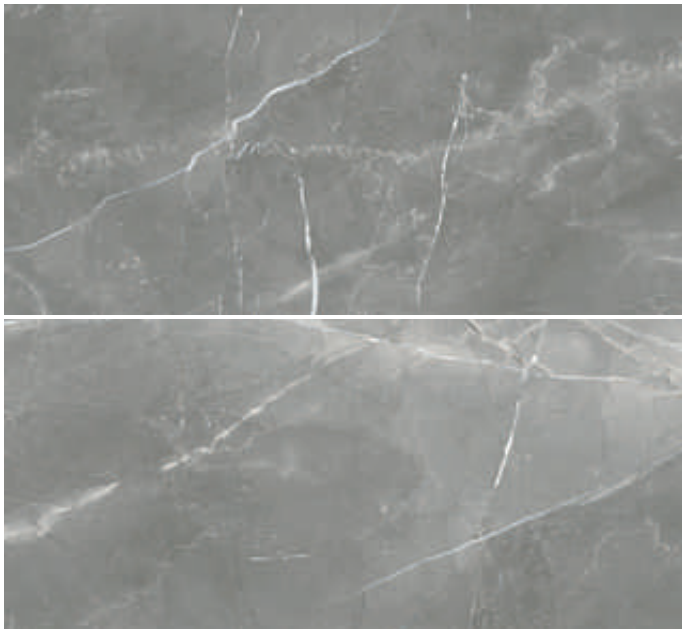

11.8"x23.6" P.E.I. III
(30x60cm)

RODUM PERLA



11.8"x23.6" P.E.I. IV
(30x60cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V3

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	9/32"	15.52	8

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 23.6" x 23.6"- Rectified (60cm x 60cm)



ROYAL PULPIS

POLISHED-NANO FINISH PORCELAIN
Rectified


STONE-MART

Installed with:
ROYAL PULPIS - GRAY
32"x32" (80x80cm)

ROYAL PULPIS
RECTIFIED POLISHED-NANO FINISH PORCELAIN

MARBLE LOOK COLLECTION

ROYAL PULPIS GRAY

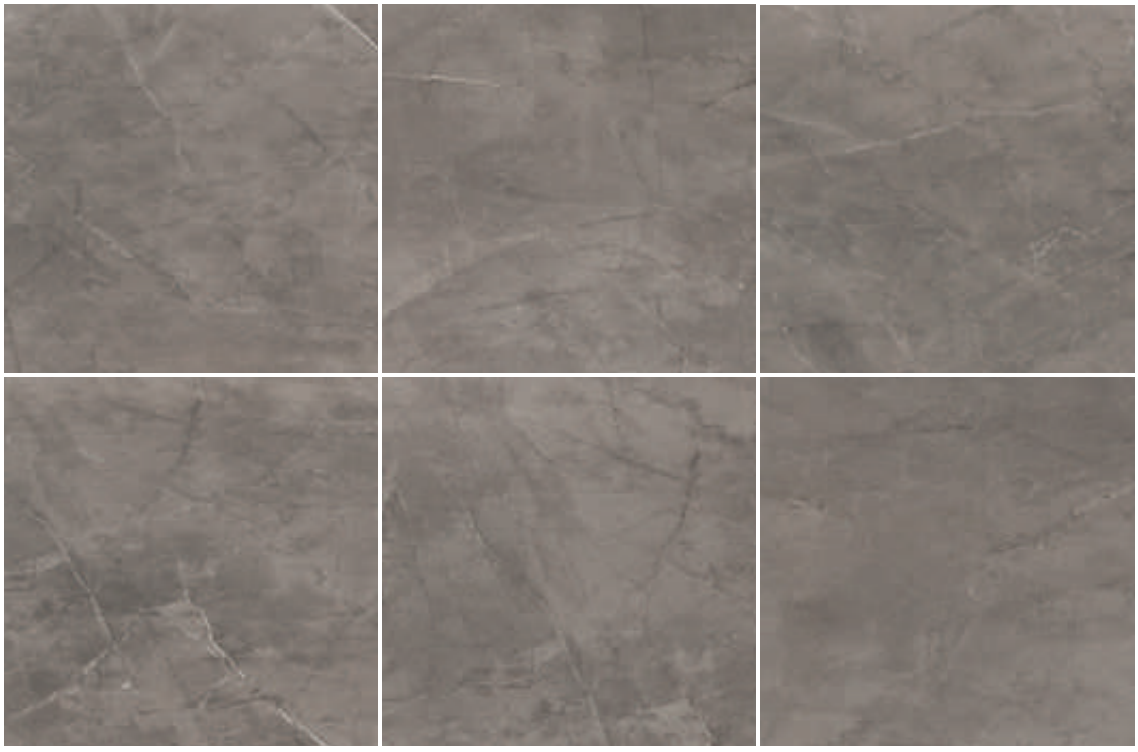

31.5"x31.5"
(80x80cm)

P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
32" x 32"(Nominal Size)	5/16"	13.78	2



SERPEGIANTE

POLISH-NANO FINISH PORCELAIN
Rectified

STONE-MART

Installed with:
SERPEGIANTE - BONE
24"x48" (60x120cm)

SERPEGIANTE
RECTIFIED POLISHED-NANO FINISH PORCELAIN

MARBLE LOOK COLLECTION

SERPEGIANTE BONE



23.6"x47.2"
(60x120cm)

P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V2

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
24" x 48"(Nominal Size)	5/16"	15.48	2

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 24" x 64"
(60cm x 160cm)



SIRIUS

POLISHED-NANO FINISH PORCELAIN
Rectified

STONE-MART

Installed with:
SIRIUS - WHITE
24"x48" (60x120cm)

SIRIUS WHITE



23.6"x47.2"
(60x120cm)

P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V2

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
24" x 48"(Nominal Size)	5/16"	15.48	2

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 48" x 96"
(120cm x 240cm)



STATUARIO

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
STATUARIO - WHITE
12”x24” (30x60cm)

STATUARIO
RECTIFIED-GLAZED PORCELAIN


MARBLE LOOK COLLECTION

STATUARIO WHITE - GLOSSY



11.8"x23.6" P.E.I. V
(30x60cm)

GLOSSY MOSAIC



2"x2" (12x12 Sheet) P.E.I. V
(30x30cm)

STATUARIO WHITE - MATTE



11.8"x23.6" P.E.I. V
(30x60cm)

MATTE MOSAIC



2"x2" (12x12 Sheet) P.E.I. V
(30x30cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 240 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	9/32"	15.52	8

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 39.3" x 39.3" (100cm x 100cm)
- 23.6" x 47.2" (60cm x 120cm)
- 23.6" x 23.6" (60cm x 60cm)
- 11.8" x 47.2" (30cm x 120cm)



Installed with: 9"x48" PECAN BEIGE Porcelain Tile



WOOD LOOK COLLECTION

GLAZED PORCELAIN

ATLANTIS 72
BOLIVIA 74
ELCANO 76
ELEVEN 78
FOREST 80
LAGUNA 82
OLD WOOD 84
PECAN 86
TEAKWOOD 88
TIBERWOOD 90



ATLANTIS

GLAZED PORCELAIN
Pressed

STONE-MART

Installed with:
ATLANTIS - BEIGE
9"x35" (24x88cm)

ATLANTIS
PRESSED-GLAZED PORCELAIN

WOOD LOOK COLLECTION

ATLANTIS BEIGE




9.4"x34.6" P.E.I. IV
(24x88cm)

ATLANTIS BLANCO



9.4"x34.6" P.E.I. IV
(24x88cm)

ATLANTIS GRIS

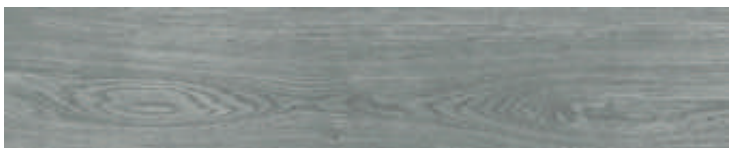

9.4"x34.6" P.E.I. IV
(24x88cm)

ATLANTIS TAUPE



9.4"x34.6" P.E.I. IV
(24x88cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.42	✓
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	✓
Ramps & Inclines	N/A	✓
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.42	✓
Heavy Commercial	≥ 0.42	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.42

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V3



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
9" x 35"(Nominal Size)	9/32"	13.62	6



BOLIVIA

GLAZED PORCELAIN
Pressed

STONE-MART

Installed with:
BOLIVIA - GRAY
9"x48" (23.3x120cm)

BOLIVIA
PRESSED-GLAZED PORCELAIN

WOOD LOOK COLLECTION

BOLIVIA BEIGE



9.17″x47.2″ P.E.I. III
(23.3x120cm)

BOLIVIA BLANCO

9.17″x47.2″ P.E.I. III
(23.3x120cm)

BOLIVIA GRAY



9.17″x47.2″ P.E.I. III
(23.3x120cm)

BOLIVIA NATURAL



9.17″x47.2″ P.E.I. III
(23.3x120cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 240 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8” min. recommended for pressed tile
- 1/16” min. recommended for rectified tile
- 3/16” when installing tile with a length 15” or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64”

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
9” x 48”(Nominal Size)	5/16”	18.06	6



ELCANO

GLAZED PORCELAIN
Pressed

STONE-MART

Installed with:
ELCANO - WENGUE
9"x48" (23.3x120cm)

ELCANO
PRESSED-GLAZED PORCELAIN

WOOD LOOK COLLECTION

ELCANO BEIGE



9.17″x47.2″ P.E.I. IV
(23.3x120cm)

ELCANO BLANCO

9.17″x47.2″ P.E.I. IV
(23.3x120cm)

ELCANO CHERRY



9.17″x47.2″ P.E.I. IV
(23.3x120cm)

ELCANO WENGUE



9.17″x47.2″ P.E.I. IV
(23.3x120cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8” min. recommended for pressed tile
- 1/16” min. recommended for rectified tile
- 3/16” when installing tile with a length 15” or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64”

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
9” x 48”(Nominal Size)	9/32”	18.06	6



ELEVEN

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
ELEVEN - HAYA
9"x48" (23.3x120cm)

ELEVEN
RECTIFIED-GLAZED PORCELAIN

WOOD LOOK COLLECTION

ELEVEN ARCE



9.17"x47.2" P.E.I. IV
(23.3x120cm)

ELEVEN GRIS



9.17"x47.2" P.E.I. IV
(23.3x120cm)

ELEVEN HAYA



9.17"x47.2" P.E.I. IV
(23.3x120cm)

ELEVEN NATURAL



9.17"x47.2" P.E.I. IV
(23.3x120cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
9" x 48"(Nominal Size)	9/32"	18.06	6

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.


- 8.9" x 47"
(22.5 cm x 119.5cm)



FOREST

GLAZED PORCELAIN
Rectified

STONE-MART

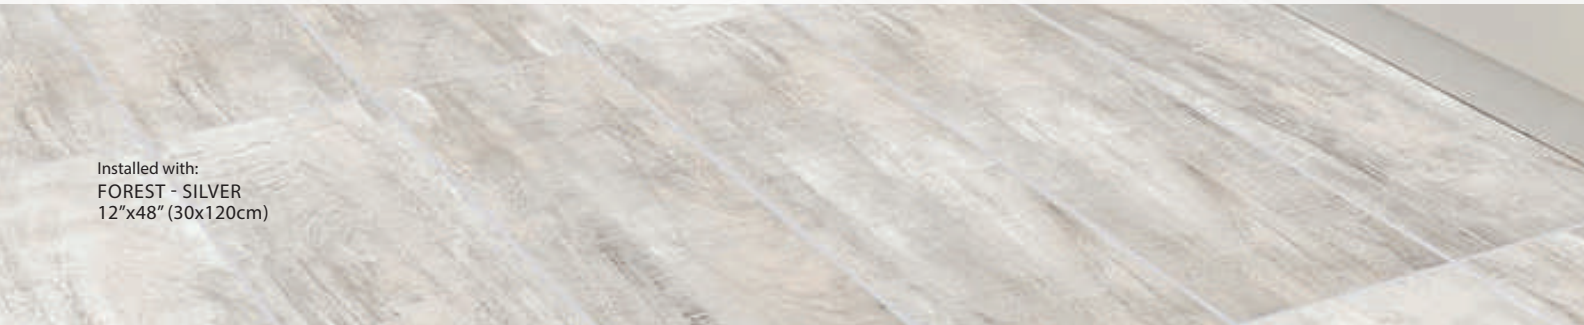

Installed with:
FOREST - SILVER
12"x48" (30x120cm)

FOREST
RECTIFIED-GLAZED PORCELAIN

WOOD LOOK COLLECTION

FOREST CHERRY



11.8"x47.2" P.E.I. IV
(30x120cm)

FOREST SILVER



11.8"x47.2" P.E.I. IV
(30x120cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.42	✓
Showers Floors (Residential or Light Commercial)	N/A	✓
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	✓
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.42	✓
Heavy Commercial	≥ 0.42	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.42

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 48"(Nominal Size)	3/8"	15.50	4

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.


- 5.5" x 47.2"
(14 cm x 120cm)



LAGUNA

GLAZED PORCELAIN
Rectified

STONE-MART

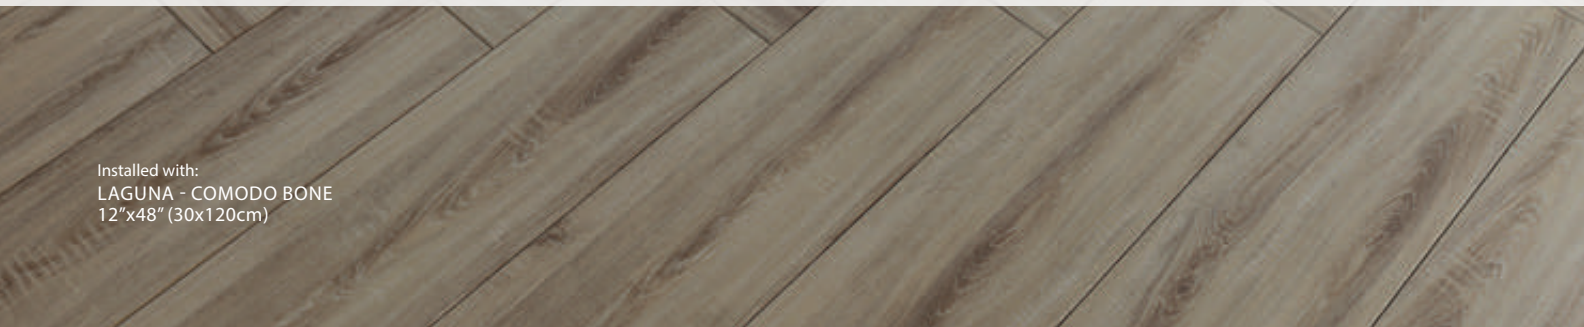

Installed with:
LAGUNA - COMODO BONE
12"x48" (30x120cm)

LAGUNA
RECTIFIED-GLAZED PORCELAIN

WOOD LOOK COLLECTION

LAGUNA ALASKA OAK



11.8"x47.2" P.E.I. IV
(30x120cm)

LAGUNA COMODO BONE



11.8"x47.2" P.E.I. IV
(30x120cm)

LAGUNA VIRGINIA OAK



11.8"x47.2" P.E.I. IV
(30x120cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 48"(Nominal Size)	1/4"	19.38	5

OLD WOOD

GLAZED PORCELAIN
Rectified

STONE-MART




Installed with:
OLD WOOD - SOUTH
12"x48" (30x120cm)

OLD WOOD
RECTIFIED-GLAZED PORCELAIN

WOOD LOOK COLLECTION

OLD WOOD SOUTH

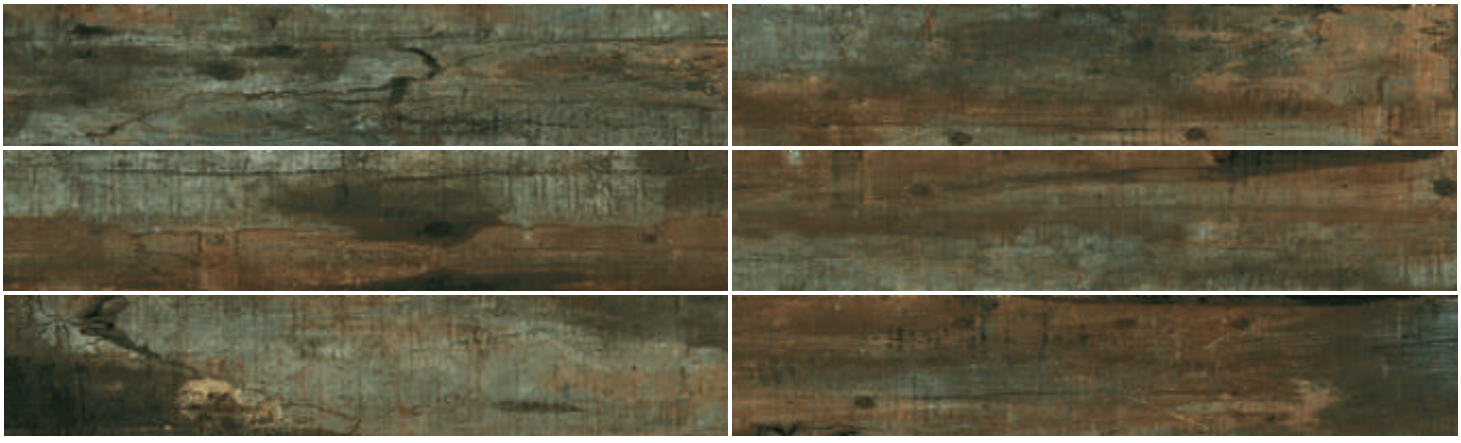

11.8"x47.2"
(30x120cm)

P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.42	✓
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.42	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.42

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 48"(Nominal Size)	3/8"	15.52	8

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 5.5" x 47.2"
(14 cm x 120cm)



PECAN

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
PECAN - GRIS
9"x48" (23.3x120cm)

PECAN
RECTIFIED-GLAZED PORCELAIN

WOOD LOOK COLLECTION

PECAN BEIGE



9.17″x47.2″ P.E.I. IV
(23.3x120cm)

PECAN BLANCO

9.17″x47.2″ P.E.I. IV
(23.3x120cm)

PECAN GRIS



9.17″x47.2″ P.E.I. IV
(23.3x120cm)

PECAN TAUPE



9.17″x47.2″ P.E.I. IV
(23.3x120cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.42	✓
Showers Floors (Residential or Light Commercial)	N/A	✓
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	✓
Ramps & Inclines	≥ 042	✓
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 042	✓
Heavy Commercial	≥ 042	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.42

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:
- 1/8” min. recommended for pressed tile
- 1/16” min. recommended for rectified tile
- 3/16” when installing tile with a length 15” or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64”

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
9” x 48”(Nominal Size)	9/32”	18.06	6

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 9.2" x 47.2" (22.5cm x 119cm)
- 6" x 24" (15.3cm x 58.9cm)



TEAKWOOD

GLAZED PORCELAIN
Pressed

STONE-MART

Installed with:
TEAKWOOD - PERLA
12"x24" (30x60cm)

TEAKWOOD PERLA



11.8"x23.6"
(30x60cm)

P.E.I. IV

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	9/32"	15.52	8

TIBERWOOD

GLAZED PORCELAIN
Rectified

STONE-MART



Installed with:
TIBERWOOD - GRIGIO
12"x48" (30x120cm)

TIBERWOOD
RECTIFIED-GLAZED PORCELAIN

WOOD LOOK COLLECTION

TIBERWOOD CHERRY



11.8"x47.2" P.E.I. IV
(30x120cm)

TIBERWOOD GRIGIO



11.8"x47.2" P.E.I. IV
(30x120cm)

TIBERWOOD NATURAL



11.8"x47.2" P.E.I. IV
(30x120cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 48"(Nominal Size)	3/8"	15.5	4

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 5.5" x 47.2"
(14cm x 120cm)



Installed with: 32"x32" VISTA GRAY Porcelain Tile



CONCRETE LOOK COLLECTION

GLAZED PORCELAIN

ALASKA 94
ARK 96
DOLMEN 98
FACTORY 100
MARN 102
VISTA 104



ALASKA

POLISHED NANO FINISH PORCELAIN
Rectified

STONE-MART

Installed with:
AKASKA - GRAY
32"x32" (80x80cm)

ALASKA
RECTIFIED POLISHED-NANO FINISH PORCELAIN

CONCRETE LOOK COLLECTION

ALASKA GRAY



31.5"x31.5"
(80x80cm)

P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation

V2

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
32" x 32"(Nominal Size)	5/16"	13.78	2

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 16" x 32"
(40cm x 80cm)



ARK

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
ARK - SILVER
12"x24" (30x60cm)

ARK
RECTIFIED-GLAZED PORCELAIN

CONCRETE LOOK COLLECTION

ARK IVORY

11.8″x23.6″ P.E.I. IV
(30x60cm)

MOSAIC

2″x2" (12x12 Sheet) P.E.I. IV
(30x30cm)

ARK SILVER



11.8″x23.6″ P.E.I. IV
(30x60cm)

MOSAIC



2″x2" (12x12 Sheet) P.E.I. IV
(30x30cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	✓
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 240 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8” min. recommended for pressed tile
- 1/16” min. recommended for rectified tile
- 3/16” when installing tile with a length 15” or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64”

Shade Variation

V2

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12” x 24”(Nominal Size)	9/32”	15.52	8

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 39.3" x 39.3" (100cm x 100cm)
- 23.6" x 47.2" (60cm x 120cm)
- 23.6" x 23.6" (60cm x 60cm)
- 11.8" x 47.2" (30cm x 120cm)



DOLMEN

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
DOLMEN - GRAY
32"x32" (80x80cm)

DOLMEN
RECTIFIED-GLAZED PORCELAIN

CONCRETE LOOK COLLECTION

DOLMEN GRAY



31.5"x31.5" P.E.I. IV
(80x80cm)

DOLMEN SAND



31.5"x31.5" P.E.I. IV
(80x80cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
32" x 32"(Nominal Size)	5/16"	13.78	2



FACTORY

GLAZED PORCELAIN
Pressed

STONE-MART

Installed with:
FACTORY - GRIS
12"x24" (30x60cm)

FACTORY BLANCO

11.8"x23.6" P.E.I. IV
(30x60cm)

FACTORY GRIS



11.8"x23.6" P.E.I. IV
(30x60cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	✓
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	✓
Ramps & Inclines	≥ 0.35	✓
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	9/32"	15.52	8

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 23.8" x 23.8" (60.5cm x 60.5cm)
- 18" x 18" (45cm x 45cm)



MARN

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
MARN - MINK
24”x48” (60x120cm)

FLOOR & WALL | HOME | LT. COMM. | MATTE | FACE 10 | RECT. | FROST

MARN MINK



23.6″x47.2″
(60x120cm)

P.E.I. III

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8” min. recommended for pressed tile
- 1/16” min. recommended for rectified tile
- 3/16” when installing tile with a length 15” or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64”

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
24” x 48”(Nominal Size)	5/16”	15.48	2



VISTA

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
VISTA - BONE
32"x32" (60x120cm)

VISTA BONE



31.5"x31.5" P.E.I. IV
(80x80cm)

VISTA GRAY



31.5"x31.5" P.E.I. IV
(80x80cm)

VISTA GRAY



23.6"x47.2" P.E.I. IV
(60x120cm)

VISTA LEAD GRAY



23.6"x47.2" P.E.I. IV
(60x120cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	N/A	

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 330 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:

- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	5/16"	13.78	2
24" x 48"(Nominal Size)	5/16"	15.48	2

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 12" x 36" (30cm x 90cm)
- 48" x 96" (120cm x 240cm)
- 48" x 48" (120cm x 120cm)

Installed with: 12"x24" LUNA OFF WHITE Porcelain Tile





DESIGNER LOOK COLLECTION

GLAZED PORCELAIN

BLANCO 108
LUNA 110
MARJINAL 112



BLANCO

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
BLANCO - WHITE
12”x24” (30x60cm)

BLANCO
RECTIFIED-GLAZED PORCELAIN

DESIGNER LOOK COLLECTION

BLANCO WHITE

11.8"x23.6"
(30x60cm)

P.E.I. IV

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	8
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:
- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation: V0

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	9/32"	15.52	8

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 31.5" x 31.5" (80cm x 80cm)
- 23.6" x 47.2" (60cm x 120cm)
- 23.6" x 23.6" (60cm x 60cm)



LUNA

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
LUNA - OFF WHITE
12”x24” (30x60cm)


LUNA
RECTIFIED-GLAZED PORCELAIN

DESIGNER LOOK COLLECTION

LUNA OFF WHITE

11.8"x23.6" P.E.I. V
(30x60cm)

MOSAIC



2"x2" (12x12 Sheet) P.E.I. V
(30x30cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.42	✓
Showers Floors (Residential or Light Commercial)	≥ 0.42	✓
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.42	✓
Heavy Commercial	≥ 0.42	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 275 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.42

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:
- 1/8" min. recommended for pressed tile
- 1/16" min. recommended for rectified tile
- 3/16" when installing tile with a length 15" or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64"

Shade Variation



SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12" x 24"(Nominal Size)	9/32"	15.52	8

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 23.6" x 47.2" (60cm x 120cm)
- 11.8" x 47.2" (30cm x 120cm)
- 23.6" x 23.6" (60cm x 60cm)



MARJINAL

GLAZED PORCELAIN
Rectified

STONE-MART

Installed with:
MARJINAL - WHITE
12”x24” (30x60cm)


MARJINAL
RECTIFIED-GLAZED PORCELAIN

DESIGNER LOOK COLLECTION

MARJINAL WHITE - GLOSSY

11.8″x23.6″ P.E.I. V
(30x60cm)

GLOSSY MOSAIC



2″x2" (12x12 Sheet) P.E.I. V
(30x30cm)


MARJINAL WHITE - GLOSSY

23.6″x47.2″ P.E.I. V
(60x120cm)

MARJINAL WHITE - MATTE

11.8″x23.6″ P.E.I. V
(30x60cm)

MATTE MOSAIC



2″x2" (12x12 Sheet) P.E.I. V
(30x30cm)

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor (Kitchens, Bathrooms, etc.)	≥ 0.35	
Showers Floors (Residential or Light Commercial)	N/A	
Exterior Floor Applications (Outdoors, Swimming Pools & Decking)	N/A	
Ramps & Inclines	N/A	
Walls/Backsplashes	N/A	✓
Residential	N/A	✓
Light Commercial	≥ 0.35	✓
Heavy Commercial	≥ 0.35	✓

PERFORMANCE CHARACTERISTICS

	ISO	ASTM	Results
Water absorption	10545-3	C373	≤ 0.5%
Breaking Strength	10545-4	C648	≥ 240 lbs.
Scratch Hardness	MOHS	MOHS	5
Chemical Resistance	10545-13	C650	Resistant
Abrasion Resistance	10545-7	C1027	≥ 0.35

A DCOF VALUE OF > 0.42 IS THE STANDARD FOR TILES SPECIFIED FOR LEVEL INTERIOR SURFACES EXPECTED TO BE WALKED UPON WHEN WET AS STATED IN ANSI 1.37.1-2012, SECTION 9.6

NOTES

*Customized display and sample programs available by request which includes mock-ups & submittal boards for large projects.
*All tile is priced per square foot but sold by the full carton.
*For all large format tile sizes we recommend the use of a leveling system to optimize installation time and avoid irregularities in the floor to achieve a perfect finish. The minimum joint recommendation is 5mm.
*Do not mix boxes of different shades/die-lots.
*The installer must check the product for defects of shade, tone and caliber before installation. The manufacturer will not accept any claims once the material has been installed.

SAMPLE OPTIONS

	Available
Full Size Loose Pieces	✓
Small Cut Swatches	✓
Architectural Binders – (Architects & Designers)	✓
Waterfall Display Sets - (Dealers Only)	✓
Story (Carry) Boards - (Dealers Only)	

INSTALLATION RECOMMENDATION

Grout Joint Recommendation

Floor:
- 1/8” min. recommended for pressed tile
- 1/16” min. recommended for rectified tile
- 3/16” when installing tile with a length 15” or greater in staggered brick joint pattern, overlap should not exceed 33% (repeat)
- Leveling system required for all BIG sizes, with a minimum joint of 5mm or 13/64”

Shade Variation

V1

SIZES AND CARTONS

	Thickness	Sqft. /Carton	Pieces/Carton
12” x 24”(Nominal Size)	9/32”	15.52	8
24” x 48”(Nominal Size)	5/16”	23.25	3

ADDITIONAL SPECIAL ORDER SIZES: Registered & Large Job Projects

*All special order items may have a production or shipping lead time of approximately 6-8 weeks. Please contact a representative for further details.

- 23.6" x 23.6" (60cm x 60cm)
- 11.8" x 47.2" (30cm x 120cm)
- 23.6" x 47.2" (60cm x 120cm)



Installed with: French Pattern LEONARDO Travertine Paver



NATURAL STONE COLLECTION

TRAVERTINE


ANTIQUE ONYX 116
AUTUMN BLEND 118
CAPPADOCIA 120
COUNTRY CLASSIC 122
IVORY 124
LEONARDO 126
LEONYX 128
NOCE 130
RIVER SERIES 132
ROMAN BLEND 134
SILVER 136



ANTIQUE ONYX

NATURAL STONE
Travertine

STONE-MART

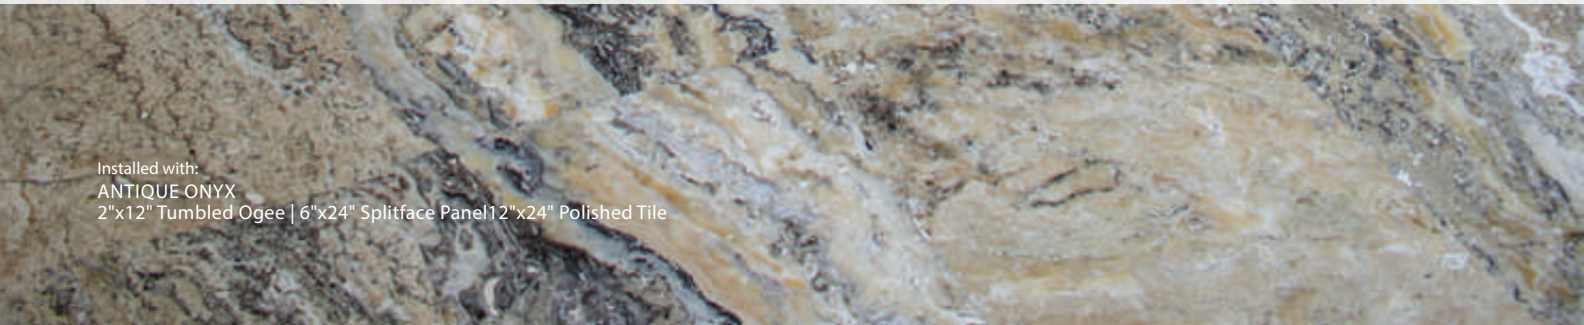


Installed with:
ANTIQUE ONYX
2"x12" Tumbled Ogee | 6"x24" Splitface Panel12"x24" Polished Tile

ANTIQUE ONYX
NATURAL STONE

TRAVERTINE COLLECTION

INTERIOR APPLICATIONS

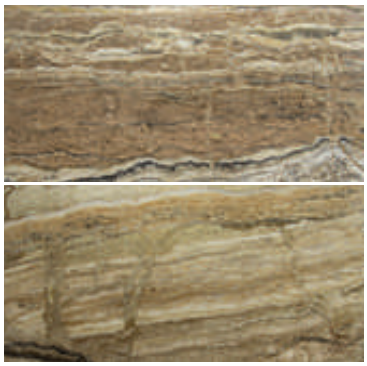

Tile
TFHONYX12X24 12"x24" Polished
TFHONYX12X24 -VEIN 12"x24" Vein-Cut



Tile (French Pattern)
TFPONYXANTQ Brushed & Chiseled (8 sqft. bundle)



Bullnose
ABUL- ONYX 3/4"x12" Tumbled



Ogee
AOGE-ONYX 2"x12" Tumbled



Mosaic
MOSONYX2X2-PLSHD 2"x2" Polished




Mosaic
MOSONYX2X2 2"x2" Tumbled




Mosaic
MOSONYX2X4 2"x4" Tumbled






Mosaic
MOSONYX1X2-SPLIT 1"x2" Splitface

Mosaic
MOSONYX1X2-SPLIT 1"x2" Splitface




Tile
TTONYXANTQ4 4"x4" Tumbled

EXTERIOR APPLICATIONS



Paver (French Pattern)
PTONYXANTQF Tumbled (8 sqft. bundle)



Paver (French Pattern)
PTONYXANTQF-VEIN Tumbled (8 sqft. bundle)



Paver
PTONYXANTQ612 6"x12" Tumbled



Paver
PTONYXANTQ612-VEIN 6"x12" Tumbled



Panel/Corner
LPONYX-CORNER 90º Splitface
LPONYX 6"x24" Splitface



Installed with: French Pattern ANTIQUE ONYX Tumbled Travertine Paver



Autumn Blend

NATURAL STONE
Travertine

STONE-MART

Installed with:
AUTUMN BLEND
French Pattern Brushed & Chiseled Tile


AUTUMN BLEND
NATURAL STONE

TRAVERTINE COLLECTION

INTERIOR APPLICATIONS



Tile
TFHAUTBLND18 18"x18" Filled & Honed
TFHAUTBLND18-PLSH 18"x18" Filled & Polished

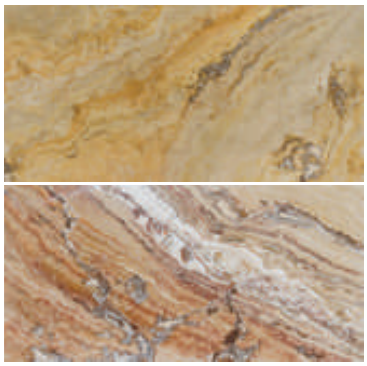

Tile
TFHAUTBLND12X24-PLSHD 12"x24" Polished



Tile (French Pattern)
TFPAUTBLND Brushed & Chiseled
(8 sqft. bundle)



Mosaic
MOSAUTBLND1X1 1"x1" Tumbled



Mosaic
MOSAUTBLND2X2 2"x2" Tumbled



Mosaic
MOSAUTBLND1X2-SPLIT 1"x2" Splitface



Mosaic
MOSAUTBLND2X4-SPLIT 2"x4" Splitface



Tile
TTAUTBLND4 4"x4" Tumbled
TTAUTBLND6 6"x6" Tumbled



Bullnose
ABUL-AUTBLND 3/4"x12" Tumbled



Ogee
AOGE-AUTBLND 2"x12" Tumbled

EXTERIOR APPLICATIONS



Paver
PTAUTBLND612 6"x12" Tumbled



Paver (French Pattern)
PTAUTBLNDFP Tumbled
(8 sqft. bundle)



Coping
CTAUTBLND24 12"x24" Tumbled



Coping *(Remodel)*
CTAUTBLND4X9-REM 4"x9" Tumbled




Installed with: French Pattern AUTUMN BLEND Tumbled Travertine Paver

CAPPADOCIA

NATURAL STONE
Travertine

STONE-MART

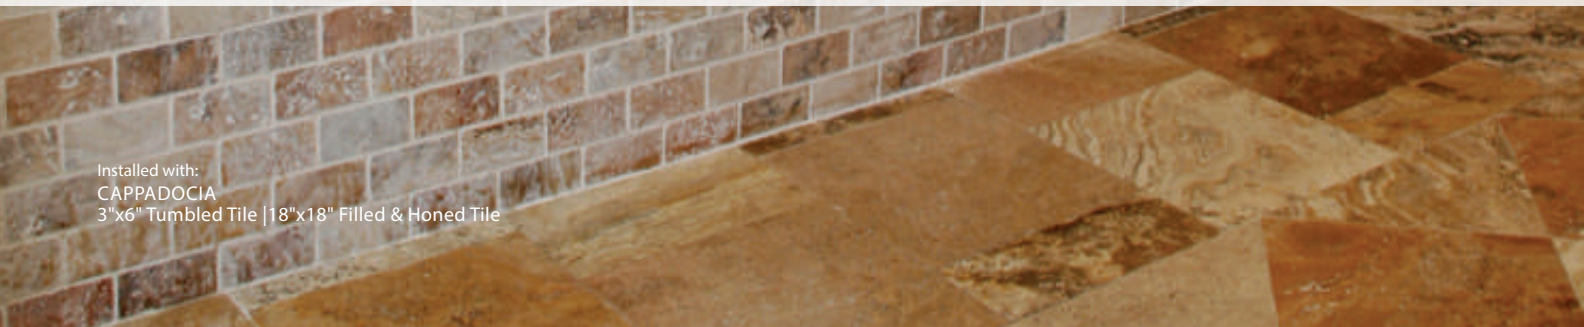

Installed with:
CAPPADOCIA
3"x6" Tumbled Tile |18"x18" Filled & Honed Tile

INTERIOR APPLICATIONS




Tile
TFHCAPPADOCIA18 18"x18" Filled & Honed



Tile *(Savannah Sunset)*
TFHSAVSUN12X24 12"x24" Filled & Polished



Tile (French Pattern)
TFPCAPPADOCIA Brushed & Chiseled
(8 sqft. bundle)



Mosaic
MOSCAPPADOCIA2X2 2"x2" Tumbled



Tile
TTCAPPADOCIA3X6 3"x6" Tumbled



Tile
TTCAPPADOCIA4 4"x4" Tumbled



Tile
TTCAPPADOCIA6 6"x6" Tumbled



Bullnose
ABUL-CAPPADOCIA 3/4"x12" Tumbled



Ogee
AOGE-CAPPADOCIA 2"x12" Tumbled

EXTERIOR APPLICATIONS



Paver
PTCAPPADOCIA4X8-THICK 4"x8"x2" Tumbled
PTCAPPADOCIA612 6"x12" - Tumbled



Paver (French Pattern)
PTCAPPADOCIAFP Tumbled
(8 sqft. bundle)



Coping
CTCAP1224 12"x24" Tumbled



Panel/Corner
LPCAPPADOCIA-CORNER 90º Splitface
LPCAPPADOCIA 6"x24" Splitface



Installed with: French Pattern CAPPADOCIA Tumbled Travertine Paver



Country Classic

NATURAL STONE
Travertine

STONE-MART



Installed with:
COUNTRY CLASSIC
18"x18" Filled & Honed Tile

INTERIOR



Tile
TFHCOUNTRY18 — 18"x18" Filled & Honed



Tile (French Pattern)
TFPCOUNTRY — Brushed & Chiseled
(8 sqft. bundle)

EXTERIOR



Paver
PTCOUNTRY16 — 16"x16" Tumbled
PTCOUNTRY24 — 24"x24" Tumbled



Paver (French Pattern)
PTCOUNTRYFP — Tumbled
(8 sqft. bundle)



Paver
PTCOUNTRY6X12 — 6"x12" Tumbled
PTCOUNTRY16X24 — 16"x24" Tumbled



Coping
CTCOUNTRY4X9 — 4"x9" Tumbled



Installed with: 16x16 COUNTRY CLASSIC Tumbled Travertine Paver



IVORY

NATURAL STONE
Travertine

STONE-MART



Installed with:
IVORY
French Pattern Brushed & Chiseled Tile

INTERIOR APPLICATIONS



Tile
TTIVO18 18"x18" Tumbled




Tile *(Patara)*
TFHPATLT12X24 12"x24" Filled & Honed
TFHPATLT18 18"x18" Filled & Honed
TFHPATLT24 24"x24" Filled & Honed



Tile *(Aspendos Ivory)*
TFHASPENDOS12X24-VEIN 12"x24" Filled & Polished



Tile (French Pattern)
TFPIVO-BLND Brushed & Chiseled
TTIVOFP-BLND Tumbled
(8 sqft. bundle)



Mosaic
MOSIVO1X1 1"x1" Tumbled



Mosaic
MOSIVO1X2 1"x2" Tumbled



Mosaic
MOSIVO1X2-SPLIT 1"x2" Splitface




Tile
TTIVO3X6 3"x6" Tumbled



Bullnose
ABUL-IVO 3/4"x12" Tumbled



Mosaic
MOSIVO2X2 2"x2" Tumbled



Mosaic
MOSIVO2X4 2"x4" Tumbled



Mosaic
MOSIVO2X4-SPLIT 2"x4" Splitface



Tile
TTIVO4 4"x4" Tumbled
TTIVO6 6"x6" Tumbled



Ogee
AOGE-IVO 2"x12" Tumbled

EXTERIOR APPLICATIONS



Paver
PTIVO4X8-THICK 4"x8x2" Tumbled
PTIVO6X12 6"x12" Tumbled
PTIVO12X24 12"x24" Tumbled
PTIVO16X24 16"x24" Tumbled
PTIVO16X24-THICK 16"x24"x2" Tumbled



Paver
PTIVO16 16"x16" Tumbled
PTIVO24 24"x24" Tumbled



Deco Drain
DECODRAIN-IVORY 6"x12" Tumbled



Coping *(Remodel)*
CTIVO4X9-REM 4"x9" Tumbled
CTIVO4x9-REM-SQ 4"x9" Tumbled
CTIVO12-REM 12"x12" Tumbled



Paver (French Pattern)
PTIVOFP Tumbled
(8 sqft. bundle)



Panel/Corner
LPIVORY-CORNER 90º Splitface
LPIVORY 6"x24" Splitface



Coping
CTIVO4X9 4"x9" Tumbled
CTIVO12 12"x12" Tumbled
CTIVO24 12"x24" Tumbled
CTIVO24-STRAIGHTEDGE 12"x24" Tumbled
CTIVO24-THICKSTRAIGHTEDGE 12"x24" Tumbled



Installed with: French Pattern IVORY Tumbled Travertine Paver



LEONARDO

NATURAL STONE

Travertine

STONE-MART

Installed with:
LEONARDO
12"x24" FIlled & Honed Tile | 4"x4" Tumbled Tile | Bullnose

INTERIOR APPLICATIONS



Tile
TFHLEO18 18"x18" Filled & Honed
TFHPLEO18-PLSHD 18"x18" Filled & Polished
TUBCLEO18 18"x18" Brushed & Chiseled



Tile
TFHLEO12x24 12"x24" Filled & Honed
TFHLEO12x24-PLSHD 12"x24" Filled & Polished



Tile (French Pattern)
TFPLEONARDO Brushed & Chiseled
(8 sqft. bundle)



Bullnose
ABUL- LEO 3/4"x12" Honed




Ogee
AOGE-LEO 2"x12" Honed



Mosaic
MOSLEO1X1 1"x1" Tumbled



Mosaic
MOSLEO2X2-PLSHD 2"x2" Polished
MOSLEO2X2 2"x2" Tumbled



Mosaic
MOSLEO1X2 1"x2" Tumbled




Mosaic
MOSLEO2X4 2"x4" Tumbled



Mosaic
MOSLEO1X2-SPLIT 1"x2" Splitface



Mosaic
MOSLEO2X4-SPLIT 2"x4" Splitface



Mosaic
TTLEO4 4"x4" Tumbled
TTLEO6 6"x6" Tumbled

EXTERIOR APPLICATIONS



Paver
PTLEO612 6"x12" Tumbled



Paver (French Pattern)
PTLEOFP Tumbled
(8 sqft. bundle)



Paver
PTLEO16X24 16"x24" Tumbled



Panel/Corner
LPLEONARDO-CORNER 90° Splitface
LPLEONARDO 6"x24" Splitface



Installed with: French Pattern LEONARDO Tumbled Travertine Paver



LEONYX


NATURAL STONE

Travertine

STONE-MART

Installed with:
LEONYX
12"x24" Unfilled & Polished Tile

INTERIOR APPLICATIONS

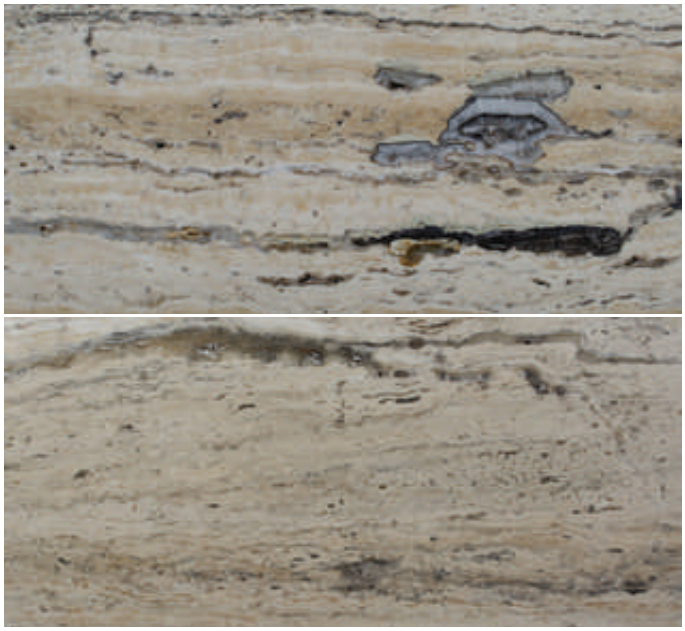

Tile
TFHLEONYX12X24-VEIN
12"x24" Unfilled & Polished



Tile (French Pattern)
TFPLEONYXFP
Brushed & Chiseled
(8 sqft. bundle)

EXTERIOR APPLICATIONS



Paver
PTLEONYX612
6"x12" Tumbled



Paver (French Pattern)
PTLEONYXFP
Tumbled
(8 sqft. bundle)



Paver
PTLEONYX612-VEIN
6"x12" Vein Tumbled



Paver (French Pattern)
PTLEONYXFP-VEIN
Vein Tumbled
(8 sqft. bundle)



Installed with: French Pattern LEONYX Tumbled Travertine Paver



NOCE

NATURAL STONE

Travertine

STONE-MART

Installed with:
NOCE
French Pattern Brushed & Chiseled Tile

INTERIOR APPLICATIONS



Tile
TUBCNOCE18 18"x18" Unfilled & Brushed



Tile (French Pattern)
TFPNOCE Brushed & Chiseled
(8 sqft. bundle)




Tile (French Pattern)
TTPNOCE-FP Tumbled
(8 sqft. bundle)



Bullnose
ABUL-NOCE 3/4"x12" Tumbled



Ogee
AOGE-NOCE 2"x12" Tumbled



Mosaic
MOSNOCE1X1 1"x1" Tumbled




Mosaic
MOSNOCE2X2 2"x2" Tumbled



Mosaic
MOSNOCE1X2-SPLIT 1"x2" Splitface



Mosaic
MOSNOCE2X4-SPLIT 2"x4" Splitface



Tile
TTNOCE3X6 3"x6" Tumbled



Tile
TTNOCE4 4"x4" Tumbled



Tile
TTNOCE6 6"x6" Tumbled

EXTERIOR APPLICATIONS



Paver
PTNOCE4X8-THICK 4"x8"x2" Tumbled
PTNOCE6X12 6"x12" Tumbled
PTNOCE16X24 16"x24" Tumbled
PTNOCE24X24 24"x24" Tumbled



Coping
CTNOCE24 12"x24" Tumbled
CTNOCE24-THICK 12"x24"x2" Tumbled



Coping (Remodel)
CTNOCE4X9-REM 4"x9" Tumbled
CTNOCE12-REM 12"x12" Tumbled



Paver (French Pattern)
PTNOCEFP Tumbled
(8 sqft. bundle)



Deco Drain
DECODRAIN-NOCE 6"x12" Tumbled



Panel/Corner
LPNOCE-CORNER 90º Splitface
LPNOCE 6"x24" Splitface



Installed with: French Pattern NOCE Tumbled Travertine Paver



RIVER SERIES

NATURAL STONE
Travertine

STONE-MART

Installed with:
LYCUS RIVER
French Pattern Brushed & Chiseled Tile

INTERIOR APPLICATIONS



Tile *(Forest River)*
TFHFOREST18 18"x18" Filled & Honed



Tile *(Glacier White)*
TFHGLACIER18 18"x18" Filled & Honed



Tile *(Lycus River)*
TFHLYCUSRIVER18 18"x18" Filled & Honed



Tile (French Pattern) (*Lycus River*)
TFPLYCUSRIVERFP-FILLED Brushed & Chiseled
(8 sqft. bundle)



Tile (French Pattern) (*Malibu*)
TTMALIBUFP Tumbled
(8 sqft. bundle)

EXTERIOR APPLICATIONS



Paver (French Pattern) (*Silver River*)
PTSILVERFP-RIVER Tumbled
(8 sqft. bundle)



Paver (French Pattern) (*Malibu*)
PTMALIBUFP Tumbled
(8 sqft. bundle)



Paver (French Pattern) (*Medium River*)
PTRIVERFP Tumbled
(8 sqft. bundle)



Paver (*Silver River*)
PTSIL612-RIVER 6"x12" Tumbled
PTSILVER16-RIVER 16"x16" Tumbled
PTSILVER16X24-RIVER 16"x24" Tumbled



Paver (*Malibu*)
PTMALIBU612 6"x12" Tumbled
PTMALIBU16X24 16"x24" Tumbled



Paver (*Medium River*)
PTRIVER612 6"x12" Tumbled



Coping (*Silver River*)
CTSIL24-RIVER 12"x24" Tumbled



Coping (*Malibu*)
CTMALIBU24 12"x24" Tumbled




ROMAN BLEND

NATURAL STONE

Travertine

STONE-MART

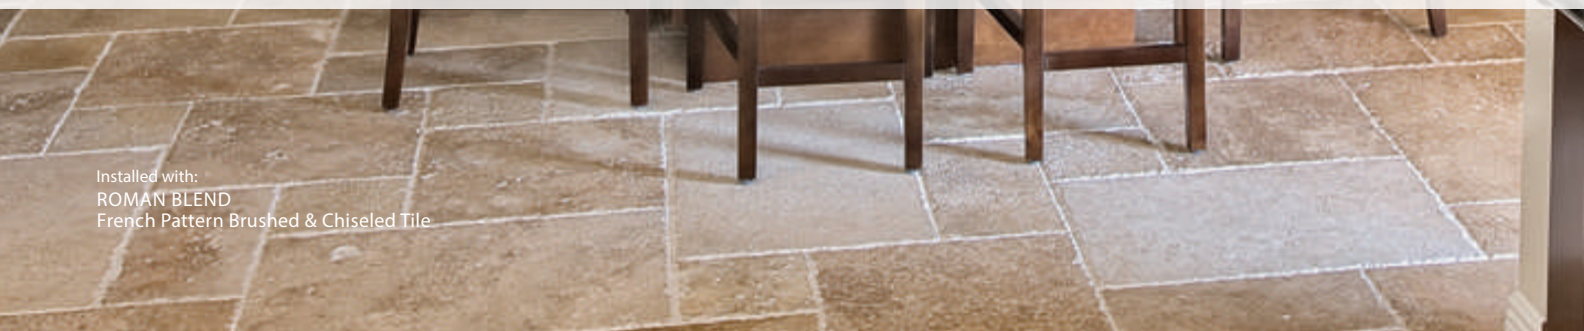

Installed with:
ROMAN BLEND
French Pattern Brushed & Chiseled Tile

INTERIOR APPLICATIONS



Tile
TFHPATMED12X24 — 12"x24" Filled & Honed



Tile (French Pattern)
TFPROMAN — Brushed & Chiseled
TFPROMAN-RUSTIC — Brushed & Chiseled (8 sqft. bundle)

EXTERIOR APPLICATIONS



Paver
PTROMAN16 — 16"x16" Tumbled
PTROMAN24 — 24"x24" Tumbled



Paver (French Pattern)
PTROMANFP — Tumbled (8 sqft. bundle)



Paver
PTROMAN6X12 — 6"x12" Tumbled
PTROMAN12X24 — 12"x24" Tumbled
PTROMAN16X24 — 16"x24" Tumbled
PTROMAN16X24-THICK — 16"x24"x2" Tumbled



Coping
CTCROMAN4X9 — 4"x9" Tumbled



Installed with: French Pattern ROMAN BLEND Tumbled Travertine Paver



SILVER

NATURAL STONE

Travertine

STONE-MART

Installed with:
SILVER
French Pattern Brushed & Chiseled Tile

INTERIOR APPLICATIONS




Tile
TFHSILVER18 18"x18" Filled & Honed
TFHSILVER24 24"x24" Filled & Honed





Tile
TFHSILVER12x24 12"x24" Filled & Honed
TFHSILVER12x24-VEIN 12"x24" Vein Cut

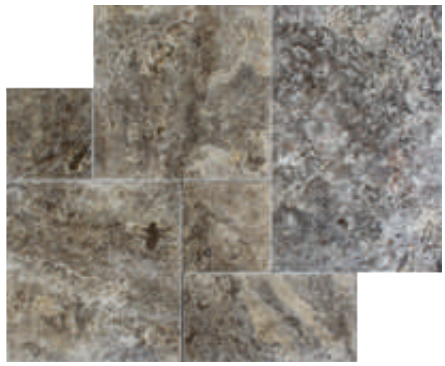

Tile (French Pattern)
TFPSILVER Brushed & Chiseled
TTSILVERFP Tumbled
(8 sqft. bundle)



Bullnose
ABUL- SILVER 3/4"x12" Honed




Ogee
AOGE-SILVER 2"x12" Honed




Mosaic
MOSSILVER1X1 1"x1" Tumbled



Mosaic
MOSSILVER2X2 2"x2" Tumbled




Mosaic
MOSSILVER1X2 1"x2" Tumbled



Mosaic
MOSSILVER1XFREE 1"xFREE" Tumbled



Mosaic
MOSSILVER1X2-SPLIT 1"x2" Splitface



Mosaic
MOSSILVER2X4-SPLIT 2"x4" Splitface



Mosaic
TTSILVER4 4"x4" Tumbled
TTSILVER6 6"x6" Tumbled

EXTERIOR APPLICATIONS



Deco Drain
DECODRAIN-SILVER 6"x12" Tumbled



Panel/Corner
LPSILVER-CORNER 90º Splitface
LPSILVER 6"x24" Splitface




Paver (French Pattern)
PTSILVERFP Tumbled
(8 sqft. bundle)



Paver (French Pattern) ***(Alaska Silver)***
PTSILVERFP-ALASKA Tumbled
(8 sqft. bundle)



Coping ***(Remodel)***
CTSIL4X9-REM 4"x9" Tumbled
CTSIL4x9-REM-SQ 4"x9" Tumbled



Panel (Dimensional)
LPSILVER-HONED 6"x24" Honed



Coping
CTSIL4X9 4"x9" Tumbled
CTSIL612 6"x12" Tumbled
CTSIL12 12"x12" Tumbled
CTSIL24 12"x24" Tumbled
CTSIL24-THICK 12"x24"x2" Tumbled
CTSIL24-STRAIGHTEDGE 12"x24" Tumbled
CTSIL24-THICKSTRAIGHTEDGE 12"x24"x2" Tumbled



Paver
PTSILVER16 16"x16" Tumbled
PSILVER24 24"x24" Tumbled



Paver
PTSILVER4X8-THICK 4"x8"x2" Tumbled
PTSILVER612 6"x12" Tumbled
PTSILVER12X24 12"x24" Tumbled
PTSILVER16X24 16"x24" Tumbled
PTSILVER6X24-THICK 16"x24"x2" Tumbled



Paver (*Alaska Silver*)
PTSILVER612-ALASKA 6"x12" Tumbled



Installed with: 18"x18" EPHESUS Polished Marble Tile



NATURAL STONE COLLECTION

MARBLE

BIANCO 140
CAPPUCCINO 142
DIANA ROYAL 144
EPHESUS 146
LILAC 148
PICASSO 150
PLATINUM GRAY 152
SKYLINE 154
TALYA GRAY 156
WHITE PEARL 158



BIANCO

NATURAL STONE
Marble

STONE-MART

Installed with:
BIANCO VENATO
2"x2" Polished Mosaic | 12"x24" Polished Tile

INTERIOR APPLICATIONS



Tile (Bianco Bella)

MBIANCOBELLA8X18	8"x18" Beveled Polished
MBIANCOBELLA12X24	12"x24" Beveled Polished
MBIANCOBELLA18X18	18"x18" Beveled Polished
MBIANCOBELLA24X24	24"x24" Beveled Polished
MBIANCOBELLA24X24-BRUSHED	24"x24" Brushed Soft Edge
MBIANCOBELLAFP-BRUSHED	FP Brushed Soft Edge

Tile *(Bianco Venato)*

MBIANCOVENATO4X12	4"x12" Polished
MBIANCOVENATO8X18	8"x18" Beveled Polished
MBIANCOVENATO12X24	12"x24" Beveled Polished
MBIANCOVENATO18X18	18"x18" Beveled Polished
MBIANCOVENATO12X24-BRUSHED	12"x24" Beveled Brushed
MBIANCOVENATO24X24	24"x24" Beveled Polished
MBIANCOVENATO24X24-BRUSHED	24"x24" Brushed Soft Edge
MBIANCOVENATOFP-BRUSHED	FP Brushed Soft Edge




Tile *(Bianco Viva)*


MBIANCOVIVA8X18	8"x18" Beveled Polished
MBIANCOVIVA12X24	12"x24" Beveled Polished
MBIANCOVIVA12X24-BRUSHED	12"x24" Beveled Brushed
MBIANCOVIVA18X18	18"x18" Beveled Polished
MBIANCOVIVA24X24	24"x24" Beveled Polished
MBIANCOVIVA24X24-BRUSHED	24"x24" Brushed Soft Edge
MBIANCOVIVAFP-BRUSHED	FP Brushed Soft Edge



Tile (French Pattern) *(Bianco Bella)*
MBIANCOBELLAFP-BRUSHED Brushed Soft Edge (8 sqft. bundle)

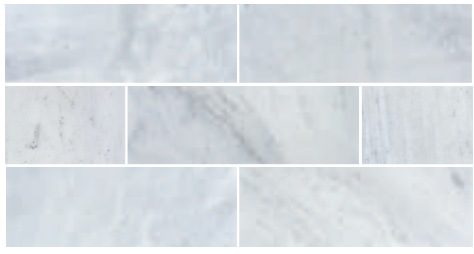

Tile *(Bianco Venato)*
MBIANCOVENATO4X12 4"x12" Polished

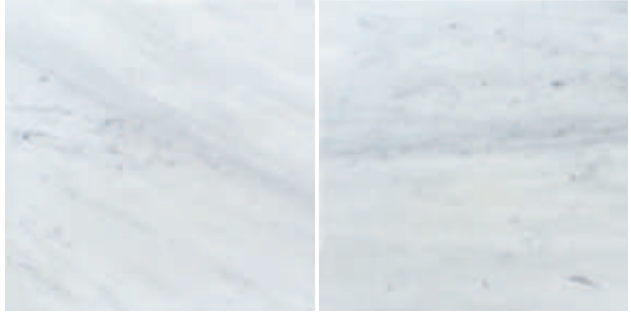

Tile *(Bianco Viva)*
MBIANCOVIVA18X18 18"x18" Beveled Polished
MBIANCOVIVA24X24 24"x24" Beveled Polished

ACCESSORIES



Mosaic
MOSBIANCOVENATO2X2 2"x2" Polished



Mosaic
MOSBIANCOVENATO2HEX 2" Hexagon Polished



Mosaic
MOSBIANCOVENATOCHEV Chevron Polished



Ogee
AOGE-BIANCOVENATO 2"x12" Polished



Bullnose
ABUL- VBANCOVENATO 3/4"x12" Polished



CAPPUCCINO

NATURAL STONE
Marble

STONE-MART



Installed with:
CAPPUCCINO
18"x18" Polished Tile

CAPPUCCINO
NATURAL STONE

MARBLE COLLECTION

INTERIOR APPLICATIONS



Tile
MCAP18 18"x18" Polished
MCAP24 24"x24" Polished



Tile (French Pattern)
MCAPFP Brushed & Chiseled
(8 sqft. bundle)

ACCESSORIES



Mosaic
MOSCAP2X2 2"x2" Polished



Mosaic
MOSCAP1X2 1"x2" Polished



Mosaic
MOSCAP1X1 1"x1" Polished



Ogee
AOGE-CAP 2"x12" Polished



Bullnose
ABUL-CAP 3/4"x12" Polished



DIANA ROYAL

NATURAL STONE
Marble

STONE-MART

Installed with:
DIANA ROYAL
2"x2" Polished Mosaic | 12"x24" Polished Tile | 24"x24" Polished Tile

INTERIOR APPLICATIONS



Tile
MDIANA18 18"x18" Polished
MDIANA24 24"x24" Polished



Tile
MDIANA12X24 12"x24" Polished



Tile (French Pattern)
MDIANAFP Brushed & Chiseled
MDIANAFP-SOFT Brushed Soft Edge
(8 sqft. bundle)



Mosaic
MOSDIANA2X2 2"x2" Polished



Mosaic
MOSDIANA1X1 1"x1" Polished



Bullnose
ABUL-DIANAROYAL 3/4"x12" Polished



Ogee
AOGE-DIANAROYAL 2"x12" Polished

EXTERIOR APPLICATIONS



Paver
PTDIANA612 6"x12" Leathered
PTDIANA16x24 16"x24" Leathered



Paver (French Pattern)
PTDIANAFP Leathered
(8 sqft. bundle)



Deco Drain
DECODRAIN-DIANA 6"x12" Leathered



Panel/Corner
LPDIANA-CORNER 90º Splitface
LPDIANA 6"x24" Splitface



Coping
CTDIANA24 12"x24" Brushed



Panel (Dimensional)
LPDIANA-PLSHD 6"x24" Polished




Installed with: French Pattern DIANA ROYAL Leathered Marble Paver



EPHESUS

NATURAL STONE
Marble

STONE-MART

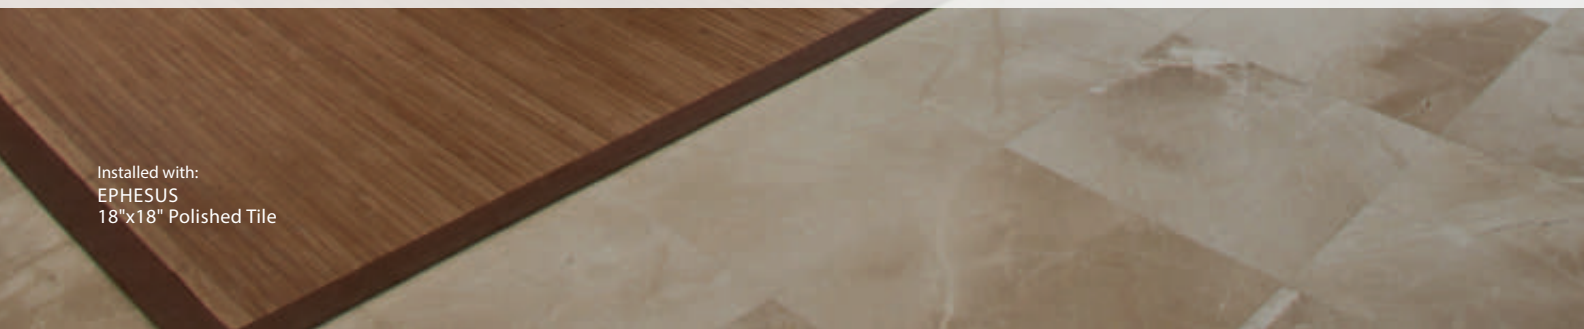


Installed with:
EPHESUS
18"x18" Polished Tile

INTERIOR APPLICATIONS



Tile
MEPHESUS24 24"x24" Polished

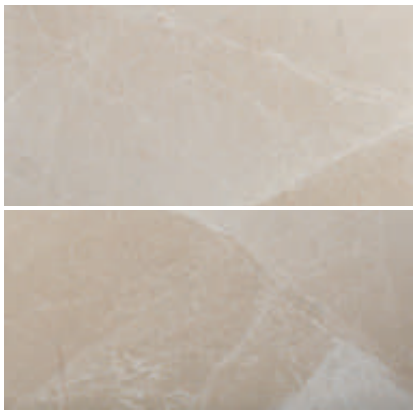

Tile
MEPHESUS12x24 12"x24" Polished



Tile (French Pattern)
MEPHESUSFP Brushed & Chiseled
MEPHESUSFP-SOFT Brushed - Soft Edge
(8 sqft. bundle)



Tile *(Anatolian Ephesus)*
MANATOLIAN18 18"x18" Polished
MANATOLIAN24 24"x24" Polished



Tile *(Anatolian Ephesus)*
MANATOLIAN12x24 12"x24" Polished



Tile (French Pattern) *(Anatolian Ephesus)*
MANATOLIANFP Brushed & Chiseled
(8 sqft. bundle)

ACCESSORIES



Mosaic
MOSEPHESUS1X1 1"x1" Polished



Mosaic
MOSEPHESUS2X2 2"x2" Polished



Bullnose
ABUL-EPHESUS 3/4"x12" Polished



Ogee
AOGE-EPHESUS 2"x12" Polished




LILAC

NATURAL STONE
Marble

STONE-MART

Installed with:
LILAC
12"x24" Polished Tile

INTERIOR APPLICATIONS

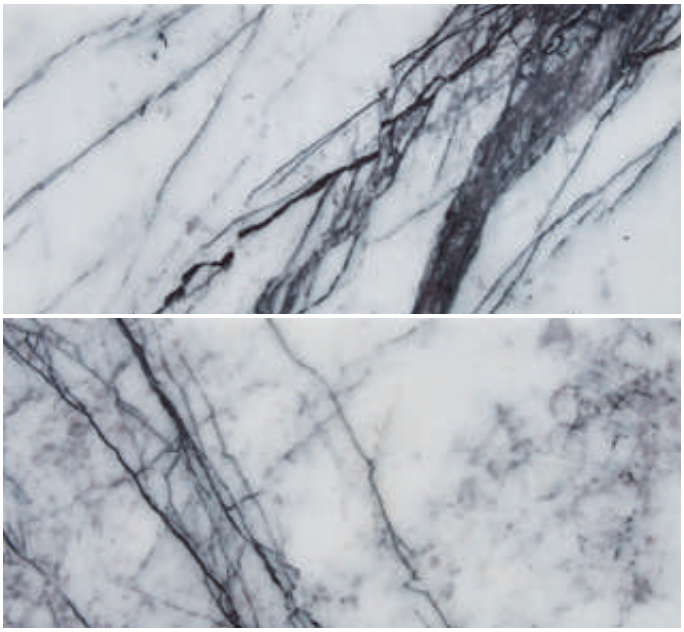

Tile
MWHITELILAC12X24 12"x24" Polished



Tile
MWHITELILAC4X12 4"x12" Polished

ACCESSORIES



Mosaic
MOSWHITELILAC2X2 2"x2" Polished



Mosaic
MOSWHITELILACHEX 2" Hexagon Polished



Mosaic
MOSWHITELILAC2X4-SPLIT 2"x4" Splitface



Panel/Corner
LPLILAC-CORNER 90º Splitface
LPLILAC 6"x24" Splitface



Ogee
AOGE-WHITELILAC 2"x12" Polished




Bullnose
ABUL- WHITELILAC 3/4"x12" Polished



PICASSO

NATURAL STONE
Marble

STONE-MART

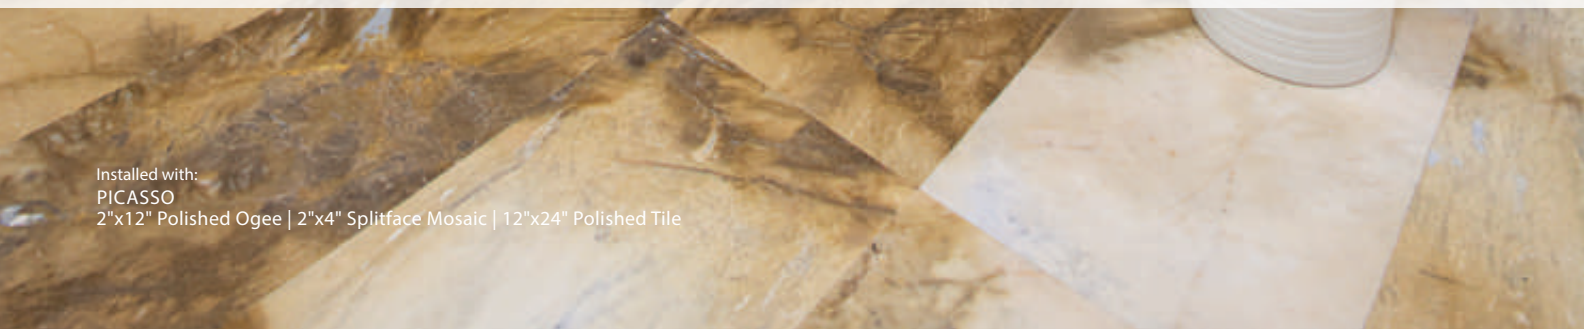

Installed with:
PICASSO
2"x12" Polished Ogee | 2"x4" Splitface Mosaic | 12"x24" Polished Tile

INTERIOR APPLICATIONS




Tile
MPICA12X24 12"x24" Polished



Mosaic
MOSPICA1X2-SPLIT 1"x2" Splitface



Mosaic
MOSPICA2X4-SPLIT 2"x4" Splitface



Mosaic
MOSPICA2X2 2"x2" Polished



Bullnose
ABUL-PICASSO 3/4"x12" Polished



Ogee
AOGE-PICASSO 2"x12" Polished

EXTERIOR APPLICATIONS



Paver
PTPICA612-LEATHER 6"x12" Leathered



Corner
LPPICA-CORNER 90º Splitface



Panel
LPPICA 6"x24" Splitface



Paver (French Pattern)
PTPICAFP-LEATHER Leathered
(8 sqft. bundle)



Platinum Gray


NATURAL STONE
Marble

STONE-MART

Installed with:
PLATINUM GRAY
12”x24” Polished Tile

PLATINUM GRAY
NATURAL STONE

INTERIOR APPLICATIONS

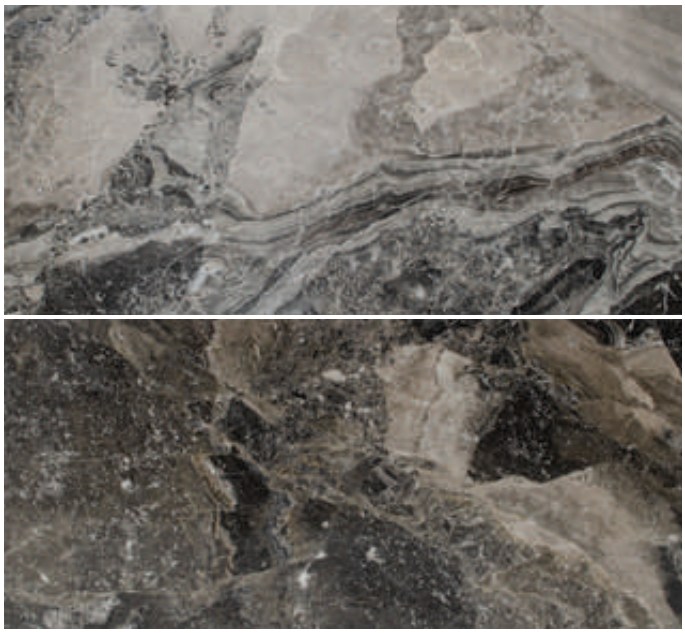


Tile
MPLATGRAY12X24 12"x24" Polished




Tile
MPLATGRAY4X12 4"x12" Polished


ACCESSORIES

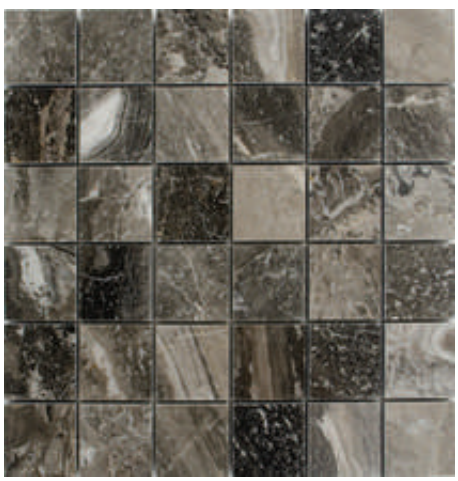

Mosaic
MOSPLATGRAY2X2 2"x2" Polished

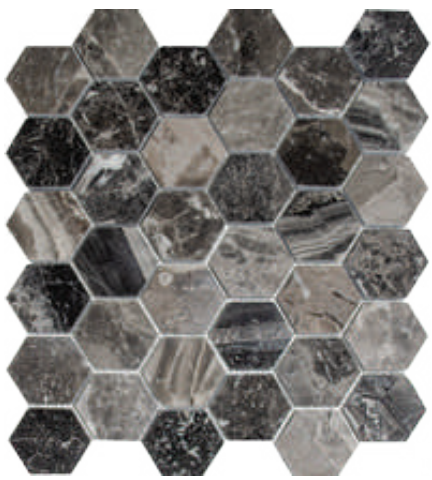

Mosaic
MOSPLATGRAYHEXA 2" Hexagon Polished



Ogee
AOGE-PLATGRAY 2"x12" Polished



Bullnose
ABUL-PLATGRAY 3/4"x12" Polished



SKYLINE

NATURAL STONE
Marble

STONE-MART

Installed with:
SKYLINE
2"Hexagon Polished Mosaic

INTERIOR APPLICATIONS



Tile
MSKY12X24 12"x24" Polished



Tile
MSKY4X12 4"x12" Polished

ACCESSORIES



Mosaic
MOSSKYHEXA 2" Hexagon Polished



Mosaic
MOSSKY2X2 2"x2" Polished



Mosaic
MOSSKYARABE Arabesque Polished



Mosaic
MOSSKY1X2 1"x2" Polished



Mosaic
MOSSKYCHEV Chevron Polished



Mosaic
MOSSKYELEGANT Elegant Polished



Mosaic
MOSSKYRANDOM Random Block Polished



Mosaic
MOSSKYLINE2X4-SPLIT 2"x4" Splitface



Bullnose
ABUL-SKY 3/4"x12" Polished



Ogee
AOGE-SKY 2"x12" Polished



Panel/Corner
LPSKY-CORNER 90º Splitface
LPSKY 6"x24" Splitface



TALYA GRAY

NATURAL STONE
Marble

STONE-MART

Installed with:
TALYA GRAY
2"x2" Honed Mosaic | 3/4"x12" Honed Ogee | 12"x24" Polished Tile

INTERIOR APPLICATIONS



Tile
MTALYA24-HONED 24"x24" Honed



Tile
MTALYA12X24 12"x24" Polished
MTALYA12X24-HONED 12"x24" Honed




Tile (French Pattern)
MTALYAFP Brushed & Chiseled
(8 sqft. bundle)



Mosaic
MOSTALYA2X2 2"x2" Honed



Bullnose
ABUL- TALYA 3/4"x12" Honed



Ogee
AOGE-TALYA 2"x12" Honed

EXTERIOR APPLICATIONS



Paver
PTTALYA612-LEATHER 6"x12" Leather & Brushed
PTTALYA16X24-LEATHER-SOFT 16"x24"Leather & Brushed




Paver (French Pattern)
PTTALYAFP-LEATHER-SOFT Leathered & Brushed
(8 sqft. bundle)



Paver
PTTALYA16-LEATHER 16"x16" Leathered & Brushed



Coping
CTTALYA24-LEATHER 12"x24" Leathered

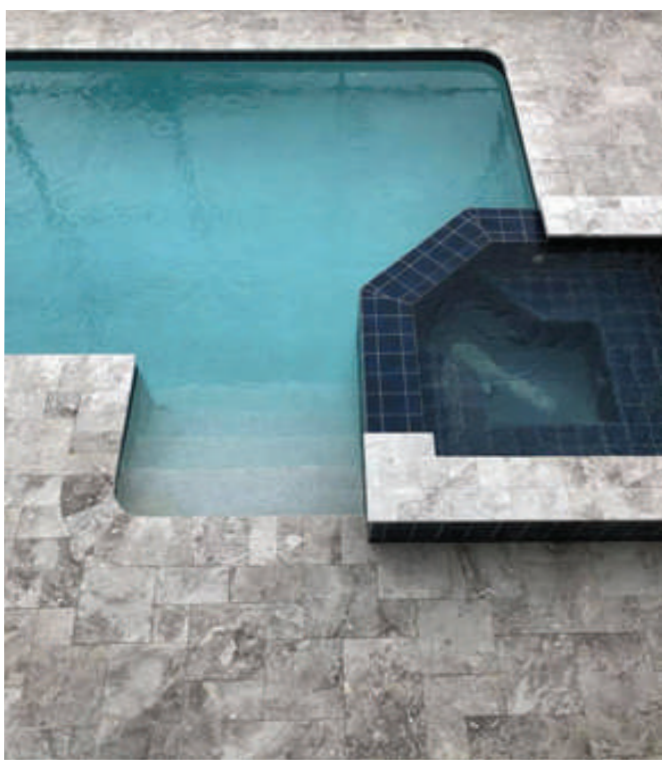

Installed with: French Pattern TALYA GRAY Leathered-Brushed Marble Paver



WHITE PEARL

NATURAL STONE
Marble

STONE-MART

Installed with:
WHITE PEARL
2"x2" Polished Mosaic | 18"x18" Polished Tile | French Pattern Brushed Tile

WHITE PEARL/AKOYA
NATURAL STONE

MARBLE COLLECTION

INTERIOR APPLICATIONS



Tile *(White Pearl)*
MWHITEPEARL18 18"x18" Polished
MWHITEPEARL24 24"x24" Polished




Tile *(Akoya)*
MAKOYA12X24-VEIN 12"x24" Polished
MAKOYA12X24-VEIN-HONED 12"x24"Honed



Tile *(White Pearl)*
MWHITEPEARL6X12 6"x12" Polished
MWHITEPEARL12x24 12"x24" Polished



Tile (French Pattern)
MCARRARAFPN Brushed & Chiseled (8 sqft. bundle)



Mosaic
MOSPEARL1X1 1"x1" Polished



Mosaic
MOSPEARL2X2 2"x2" Polished



Mosaic
MOSWHITEPEARLHEX 2" Hexagon Pol



Mosaic
MOSPEARL1X2-SPLIT 1"x2" Splitface



Mosaic
MOSPEARL2X4-SPLIT 2"x4" Splitface



Bullnose
ABUL- CARRARA 3/4"x12" Polished



Ogee
AOGE-CARRARA 2"x12" Tumbled

EXTERIOR APPLICATIONS



Paver
PTLAKOYA612-LEATHER 6"x12" Leathered
PTLAKOYA16X24-LEATHER 16"x24" Leathered



Panel
LPPEARL-PLSHD 6"x24" Dimensional




Panel/Corner
LPPEARL-CORNER 90º Splitface
LPPEARL 6"x24" Splitface



Paver (Akoya)
PTAKOYAFP-LEATHER Leathered (8 sqft. bundle)



Coping
CTAKOYA24-BRUSHED 12"x24" Brushed

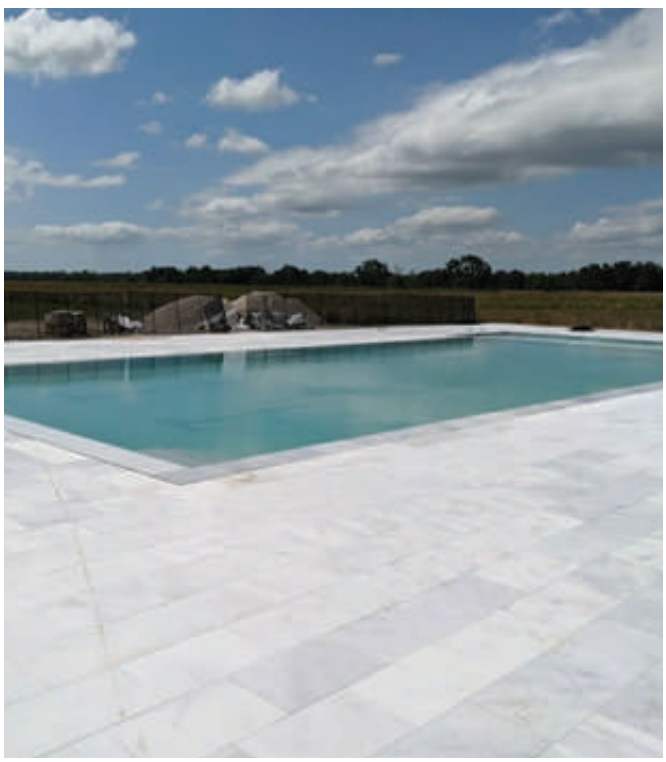

Installed with: 16x24 AKOYA Leathered-Brushed Marble Paver





NATURAL STONE COLLECTION

LIMESTONE

SHELL STONE 162



SHELL STONE

NATURAL STONE

Limestone

STONE-MART

Installed with:

SHELL STONE

2"x4" Splitface Mosaic | 3/4"x12 Ogee | 12"x24" Polished Tile | 24"x24" Brushed Tile

INTERIOR APPLICATIONS



Tile
TUSHELL18 18"x18" Brushed
TUSHELL24 24"x24" Brushed



Tile
TUBSHELL12x24 12"x24" Brushed
TFHSHELL12x24-PLSHD 12"x24"Polished



Tile (French Pattern)
TFPSHELL Brushed & Chiseled
(8 sqft. bundle)



Mosaic
MOSSHELL2X2 2"x2" Honed
MOSSHE2X2-PLSDH 2"x2" Polished



Mosaic
MOSSHELL1X2-SPLIT 1"x2" Splitface



Mosaic
MOSSHELL2X4-SPLIT 2"x4" Splitface



Tile
TTSHELL4 4"x4" Tumbled



Bullnose
ABUL-SHELL 3/4"x12" Honed



Ogee
AOGE-SHELL 2"x12" Honed

EXTERIOR APPLICATIONS



Paver
PTSHELL16 16"x16" Tumbled
PTSHELL24 24"x24" Tumbled



Paver
PTSHELL6x12 6"x12" Tumbled
PTSHELL12x24 12"x24" Tumbled
PTSHELL16x24 16"x24" Tumbled
PTSHELL16x24-THICK 16"x24x2" Tumbled



Coping
CTSHELL4x9 4"x9" Tumbled
CTSHELL612 6"x12" Tumbled
CTSHELL24 12"x24" Tumbled
CTSHELL24-THICK 12"x24x2" Tumbled



Paver (French Pattern)
PTSHELLFP Tumbled
(8 sqft. bundle)



Coping (Remodeling)
CTSHELL4X9REM 4"x9x4" Tumbled
CTSHELL12REM 12"x12x4" Tumbled



Installed with: 24"x24" SHELL STONE Tumbled Limestone Paver

INTRODUCTION

The manufacturer has crafted a series of recommendations for the correct installation of porcelain tile. In the same way that it is necessary for tile to have processional features it is common sense that these requirements should be applicable to construction and installation professionals.

BONDING MATERIALS

In addition to proper installation methods the use of suitable materials such as; thin sets, adhesives, grout, waterproofing and anti-fracture membranes should be installed according to the manufacturers recommendations for installations to assure the life and performance of the tile.

IMPORTANT RULE

When installing porcelain with a shade variance it is necessary to mix pieces from different boxes (with matching dye-lots) This step is essential not only for high shade variance, but for all tiles.

WALL TILES

Tiles in a medium to large format should be applied on a thin layer (Thin set) with polymer additives. Smaller formats should be applied on a thicker (mortar) bed using a traditional adhesive.

FLOOR TILES

The installation of floor tiles requires the proper use of building materials as recommended by the manufacturer to assure proper tile performance. Substrates should be well proportioned and cured. You must respect drying and cure times of the substrate. A damp surface is unstable and can cause bonding problems that can result in rupture or lifting of tiles over time. To ensure proper bonding a through cleaning may be required. Existence of powdered residues, greases, paints, effloresce, slurries, ETC. will weaken the bond.






TO ENSURE A PROPER BOND AND LONG LIFE OF THE INSTALLATION THE FOLLOWING FACTORS SHOULD BE CONSIDERED:

- Carefully follow the manufacturers recommendations of the proper adhesives.
- Prepare setting materials using the proper mixture to achieve a smooth product.
- Back-buttering the tile as well as the proper mortar bed level assures maximum contact between tile and substrate.
- All joints should be cleaned of any traces of adhesives to allow for proper level of grout to be filled later.

LEVELING CLIPS

Following the latest trends in flooring the tiles sizes are getting larger and larger. A big or large tile is referred to as a "LFT" (Large Format Tile). The advantage of these materials is that they have a greater flexibility while maintaining the values for hardness and breaking strength. A large format tile greater than 15 inches in length always requires a "LFT" thin set / mortar as recommended by the manufacturer.

In the market there are specific fitting/leveling installation systems for this type of product. With these systems we are able to overcome the unevenness of the floor and accommodate the curvature of the pieces getting a much flatter surface. We recommend the use of a leveling clip system to optimize installation time, avoid irregularities in the floor, and get a perfect finish. The minimum grout joint recommendation is 5MM or 13"/64".

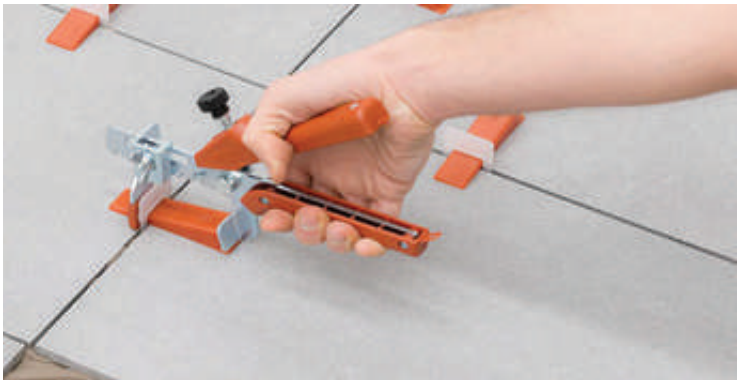



Mandatory use of a leveling system is required for the installation of "LFT" tiles greater than 15" in length. The manufacturer will not accept any claims if the material is installed without a leveling system.

GROUT JOINTS

Grout joints play an important aesthetic function, they enhance the inherent beauty of the finished product. Grout joints help absorb the stress and support to a load. If the pieces are placed too close and there is not allotment for movement then the accumulating pressure can produce tile lifting.

Keep in mind that the base support is usually subjective to continuous surface expansion and contraction caused by temperature changes, structural movements, the effect of water/moisture, chemical reactions, or shrinkage of the cement/grout itself has an impact on installation.

WARNING: Laying tiles without grout joints is inadvisable and can result in installation complications. The manufacturer does not recommend the installation of tiles without grout joints. For commercial specified projects the size of the grout joints must be detailed fully in the building project and must be set by the architect or engineer. They are places in relation to structural joints which are needed in the construction process.

The grout joint is the space left between all adjacent tiles for functional or aesthetic reasons. In order to compensate for any small dimensional deviations, we recommend the use of spacers/wedges to ensure the consistent thickness of the grout joint. Grout joints help to absorb any deformations as a result of stress when subjected to a load.
If tiles are installed/butted right against each other and there is no movement in the joints the accumulated tension can result in tile lift off, swelling, and spalling. Therefore, we recommend a 5MM grout joint.

RECTANGULAR "PLANK" LAYOUT

Rectangular sized tiles should be installed as per the tile installation instructions stated on each box. When installing a staggered brick joint pattern, the overlap should not exceed 33% repeat.





COLLECTION	SERIES	COUNTRY OF ORIGIN	SIZE	SQFT. / EA	SQFT. / BOX	SQFT. / PALLET
Stone	Alamo	Spain	12" x 24"	1.91 SF	15.52 SF	931.2 SF
Concrete	Alaska	Turkey	32" x 32"	6.89 SF	13.78 SF	482.3 SF
Marble	Albatros	Turkey	24" x 48"	7.75 SF	15.50 SF	495.36 SF
Marble	Antrasit-Atlantis	Turkey	24" x 48"	7.75 SF	15.50 SF	495.36 SF
Marble	Amberes	Spain	12" x 24"	1.91 SF	15.50 SF	930 SF
Stone	Arcano	Spain	12" x 24"	1.91 SF	15.50 SF	930 SF
Marble	Arma	Turkey	32" x 32"	6.89 SF	13.78 SF	482.3 SF
Marble	Armada	Turkey	24" x 48"	7.75 SF	15.50 SF	495.36 SF
Marble	Armada	Turkey	32" x 32"	6.89 SF	13.78 SF	482.3 SF
Concrete	Ark	Turkey	12" x 24	1.93 SF	15.50 SF	496 SF
Wood	Atlantis	Spain	9" x 35"	3.02 SF	18.08 SF	760 SF
Designer	Blanco	Spain	12" x 24"	1.91 SF	15.50 SF	930 SF
Wood	Bolivia	Spain	9" x 48"	3.01 SF	18.06 SF	758.52 SF
Marble	Calacatta	Turkey	32" x 32"	6.89 SF	13.78 SF	482.3 SF
Marble	Canyon	Turkey	12" x 24"	1.93 SF	15.50 SF	496 SF
Marble	Carrara	Spain	12 x 24"	1.91 SF	15.50 SF	930 SF
Concrete	Dolmen	Turkey	32" x 32"	6.89 SF	13.78 SF	482.3 SF
Marble	Dolomiti Bianco	Spain	24" x 48"	7.75 SF	15.50 SF	495.36 SF
Marble	Duval	Turkey	32" x 32"	6.89 SF	13.78 SF	482.3 SF
Wood	Elcano	Spain	9" x 48"	3.02 SF	18.08 SF	760 SF
Wood	Eleven	Spain	9" x 48"	3.02 SF	18.08 SF	760 SF
Concrete	Factory	Spain	12" x 24"	1.91 SF	15.50 SF	930 SF
Wood	Forest	Turkey	12" x 48"	3.87 SF	15.50 SF	620 SF
Marble	Kerala	Spain	12" x 24"	1.91 SF	15.50 SF	930 SF
Wood	Laguna	Turkey	12" x 48"	3.87 SF	15.50 SF	620 SF
Stone	Leonardo	Turkey	24" x 48"	7.75 SF	15.50 SF	495.36 SF
Designer	Luna	Turkey	12" x 24"	1.93 SF	15.50 SF	496 SF
Concrete	Marjinal	Turkey	12" x 24"	1.93 SF	15.50 SF	496 SF
Concrete	Marn	Turkey	24" x 48"	7.75 SF	15.50 sf	495.36 SF
Stone	Mineral	Spain	12" x 24"	1.91 SF	15.50 SF	930 SF
Marble	Mood	Turkey	12" x 24"	1.93 SF	15.50 SF	496 SF
Stone	Nara	Spain	12" x 24"	1.91 SF	15.50 SF	930 SF
Marble	Omnia	Turkey	12" x 24"	1.93 SF	15.50 SF	496 SF
Marble	Oniks	Turkey	24" x 48"	7.75 SF	15.50 SF	495.36 SF
Wood	Old Wood	Turkey	12" x 48"	3.87 SF	15.50 SF	620 SF
Marble	Opal	Turkey	24" x 48"	7.75 SF	15.50 SF	495.36 SF
Marble	Palatina	Spain	12" x 24"	1.91 SF	15.50 SF	930 SF
Marble	Pearl	Turkey	12" x 24"	1.91 SF	15.50 SF	930 SF
Wood	Pecan	Spain	9" x 48"	3.02 SF	18.08 SF	760 SF
Marble	Pulpis	Turkey	12" x 24"	1.93 SF	15.50 SF	496 SF
Stone	Rodum	Spain	12" x 24"	1.91 SF	15.50 SF	930 SF
Marble	Royal Pulpis	Turkey	32" x 32"	6.89 SF	13.78 SF	482.3 SF
Stone	Royal Travertine	Turkey	32" x 32"	6.89 SF	13.78 SF	482.3 SF
Marble	Serpegiante	Turkey	24" x 48"	7.75 SF	15.50 SF	495.36 SF
Marble	Sirius	Turkey	24" x 48"	7.75 SF	15.50 SF	495.36 SF
Marble	Statuario	Turkey	12" x 24"	1.91 SF	15.50 SF	930 SF
Wood	Teakwood	Spain	12" x 24"	1.91 SF	15.50 SF	930 SF
Wood	Tiberwood	Turkey	12" x 48"	3.87 SF	15.50 SF	620 SF
Concrete	Vista	Turkey	24" x 48"	7.75 SF	15.50 SF	495.36 SF
Concrete	Vista	Turkey	32" x 32"	6.89 SF	13.78 SF	482.3 SF

COLLECTION	SERIES	PC / BOX	PC / PALLET	BOXES / PALLET	WEIGHT / PC	WEIGHT / BOX	WEIGHT / PALLET
Stone	Alamo	8	480 EA	60	7.34 lbs	54.32 lbs	3,567 lbs
Concrete	Alaska	2	70 EA	35	31.5 lbs	63 lbs	2,205 lbs
Marble	Albatros	2	64 EA	32	35 lbs	70 lbs	2,240 lbs
Marble	Antrasit-Atlantis	2	64 EA	32	35 lbs	70 SF	2,240 lbs
Marble	Amberes	8	480 EA	60	7.34 lbs	58.73 lbs	3,567 lbs
Stone	Arcano	8	480 EA	60	7.34 lbs	58.73 lbs	3,567 lbs
Marble	Arma	2	70 EA	35	31.5 lbs	63 lbs	2,205 lbs
Marble	Armada	2	64 EA	32	35 lbs	70 lbs	2,240 lbs
Marble	Armada	2	70 EA	35	31.5 lbs	63 lbs	2,205 lbs
Concrete	Ark	8	256 EA	32	7.71 lbs	61.68 lbs	2,014 lbs
Wood	Atlantis	6	252 EA	42	11.36 lbs	68.14 lbs	2,862 lbs
Designer	Blanco	8	480 EA	60	7.34 lbs	58.73 lbs	3,567 lbs
Wood	Bolivia	6	252 EA	42	11.36 lbs	68.14 lbs	2,862 lbs
Marble	Calacatta	2	70 EA	35	31.5 lbs	63 lbs	2,205 lbs
Marble	Canyon	8	256 EA	32	7.71 lbs	61.68 lbs	2,014 lbs
Marble	Carrara	8	480 EA	60	7.34 lbs	58.73 lbs	3,567 lbs
Concrete	Dolmen	2	70 EA	35	31.5 lbs	63 lbs	2,205 lbs
Marble	Dolomiti Bianco	6	252 EA	42	11.36 lbs	68.14 lbs	2,862 lbs
Marble	Duval	2	70 EA	35	31.5 lbs	63 lbs	2,205 lbs
Wood	Elcano	6	252 EA	42	11.36 lbs	68.14 lbs	2,862 lbs
Wood	Eleven	6	252 EA	42	11.36 lbs	68.14 lbs	2.862 lbs
Concrete	Factory	8	480 EA	60	7.34 lbs	58.73 lbs	3,567 lbs
Wood	Forest	4	160 EA	40	15.43 lbs	61.73 lbs	2,591 lbs
Marble	Kerala	8	480 EA	60	7.34 lbs	58.73 lbs	3,567 lbs
Stone	Laguna	4	160 EA	40	15.34 lbs	61.73 lbs	2,591 lbs
Stone	Leonardo	2	64 EA	32	35 lbs	70 lbs	2,240 lbs
Designer	Luna	8	256 EA	32	7.71 lbs	61.68 lbs	2,014 lbs
Concrete	Marjinal	8	256 EA	32	7.71 lbs	61.68 lbs	2,014 lbs
Concrete	Marn	2	64 EA	32	35 lbs	70 lbs	2,240 lbs
Stone	Mineral	8	480 EA	60	7.34 lbs	58.73 lbs	3,567 lbs
Marble	Mood	8	256 EA	32	7.71 lbs	61.68 lbs	2,014 lbs
Stone	Nara	8	480 EA	60	7.34 lbs	58.73 lbs	3,567 lbs
Marble	Omnia	8	256 EA	32	7.71 lbs	61.68 lbs	2,014 lbs
Marble	Oniks	2	64 EA	32	35 lbs	70 lbs	2,240 lbs
Wood	Old Wood	4	160 EA	40	15.43 lbs	61.73 lbs	2,591 lbs
Marble	Opal	2	64 EA	32	35 lbs	70 lbs	2,240 lbs
Marble	Palatina	8	480 EA	60	7.34 lbs	58.73 lbs	3,567 lbs
Marble	Pearl	8	480 EA	60	7.34 lbs	58.73 lbs	3,567 lbs
Wood	Pecan	6	252 EA	42	11.36 lbs	68.14 lbs	2,862 lbs
Marble	Pulpis	8	256 EA	32	7.71 lbs	61.68 lbs	2,014 lbs
Stone	Rodum	8	480 EA	60	7.34 lbs	58.73 lbs	3,567 lbs
Marble	Royal Pulpis	2	70 EA	35	31.5 lbs	63 lbs	2,205 lbs
Stone	Royal Travertine	2	70 EA	35	31.5 lbs	63 lbs	2,205 lbs
Marble	Serpegiante	2	64 EA	32	35 lbs	70 lbs	2,240 lbs
Marble	Sirius	2	64 EA	32	35 lbs	70 lbs	2,240 lbs
Marble	Statuario	8	680 EA	60	7.34 lbs	58.73 lbs	3,567 lbs
Wood	Teakwood	8	480 EA	60	7.34 lbs	58.73 lbs	3,567 lbs
Wood	Tiberwood	4	160 EA	40	15.43 lbs	61.73 lbs	2,591 lbs
Concrete	Vista	2	64 EA	32	35 lbs	70 lbs	2,240 lbs
Concrete	Vista	2	70 EA	35	31.5 lbs	63 lbs	2,205 lbs

ITEM CLASS	SIZE	SALES UNIT	PCS-SQFT/BOX	BOX / CRATE	PCS / CRATE	WEIGHT / CRATE
Cladding-Corner	N/A	EA	4	28	112	896
Cladding-Cubic	6x24	EA	6	24	144	1440
Cladding-Splitface	6x24	EA	6	24	144	1440
Cladding-Splitface	4"xFree	SQFT	3.23	76	245.48	3,436.72
Coping	12x24x1-1/4	EA	N/A	N/A	62	1984
Coping	4x9x1-1/2"	EA	N/A	N/A	542	2710
Coping	6x12x1-1/4	EA	N/A	N/A	248	1984
Coping-Remodel	4x9x4	EA	N/A	N/A	336	2016
Coping-Remodel	12x12x4	EA	N/A	N/A	80	1600
Coping-Thick	12x24x2	EA	N/A	N/A	40	2,080
Drain	6x12x1-1/4	EA	N/A	N/A	264	2,112
Mosaic	1x1	EA	10	54	540	2,160
Mosaic	1x2	EA	10	54	540	2,160
Mosaic	2x2	EA	10	54	540	2,160
Mosaic	Arabesque	EA	5	108	540	2,700
Mosaic	Chevron	EA	5	90	450	2,250
Mosaic	Elegant	EA	10	45	450	2,250
Mosaic	Hexagon	EA	Up to 10	Up to 63	Up to 630	3,150
Mosaic	Random	EA	10	54	540	2,160
Mosaic	2x4	EA	10	54	540	2,160
Mosaic	1/2"xFree	EA	10	54	540	2,700
Mosaic Splitface	1x2	EA	10	54	540	2,700
Mosaic-Splitface	2x4	EA	5	54	270	2,160
Mosaic-Weave	2x2	EA	10	54	540	2,700
Mosaic-Weave	2x4	EA	10	54	540	2,700
Ogee	2x12	EA	Up to 36	Up to 144	Up to 1,728	Up to 2,592
Paver	12x24	SQFT	N/A	N/A	66	2,112
Paver	16x16	SQFT	N/A	N/A	66	1,880
Paver	16x24	SQFT	N/A	N/A	66	2,820
Paver	24x24	SQFT	N/A	N/A	33	2,112
Paver	6x12	SQFT	N/A	N/A	396	3,168
Paver	French Pattern	SQFT	8	22 Bundles	11 Sets	2,816
Paver-Thick	4x8x2	SQFT	N/A	N/A	540	3,229
Paver-Thick	16x24x2	SQFT	N/A	N/A	40	2,777
Pencil	3/4x12	EA	Up to 70	Up to 56	Up to 3,780	Up to 2,268
Tile	8x18	SQFT	N/A	N/A	360	2,700
Tile	4x12	SQFT	30	36	1,080	2,673
Tile	24x24	SQFT	N/A	N/A	80	2,560
Tile	6x12	SQFT	N/A	N/A	720	2,700
Tile	18x18	SQFT	N/A	N/A	160	2,700
Tile	12x24	SQFT	N/A	N/A	160	2,400
Tile	12x12	SQFT	N/A	N/A	360	2,700
Tile	3x6	EA	48	96	4,608	3,456
Tile	4x4	EA	50	100	5,000	3,333
Tile	6x6	EA	24	96	2,304	3,456
Tile	French Pattern	SQFT	8	52 Bundles	26 Sets	2,912

We recommend confirming packaging details with your sales person with every order. Natural stone packaging details may vary.
The packaging details provided are the most commonly used for each product group.

The color of the physical product may vary from the printed tone. The reproduction of photographs in this catalog may not match the exact color of the physical product.

The company reserves the right to change specifications of products at any time and without prior notice.

For more information you can contact the company at:
www.stone-mart.com

Stone-Mart General Catalog 2021.